

A

PATENT

Docket No. 1232-4578

Express Mail Label No. EJ606947955US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and

Address(es):

Masaki OKADA, 31-7-302, Nishiterao 4-chome, Kanagawa-ku, Yokohama-shi,
Kanagawa-ken, Japan; and Keihiro KURAKATA, 72-1-409, Suzukicho 1-chome,
Kodaira-shi, Tokyo, Japan

For:

ELECTRONIC DEVICE USING OPERATING SYSTEM FOR OVERALL
APPARATUS CONTROL INCLUDING MECHANICAL OPERATION

Enclosed are:

[X] 46 page(s) of specification, 1 page(s) of Abstract, 12 page(s) of claims

[X] 12 sheets of drawing [X] formal [] informal

[X] 6 Page(s) of Declaration and Power of Attorney

[] Unsigned

[X] Newly Executed

[] Copy from prior application

[] Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

[X] Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

[] Microfiche Computer Program (Appendix)

[] _____ page(s) of Sequence Listing

[] computer readable disk containing Sequence Listing

[] Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

[X] Claim for Priority Japanese Application Nos. 10-286132 filed 10/8/98 and 11-218084 filed 7/30/99

- ☐ Certified copy of Priority Document(s)
 - ☐ English translation documents
- ☐ Information Disclosure Statement
 - ☐ Copy of __cited references w/ English Abstracts
 - ☐ Copy of PTO-1449 filed in parent application serial No. _____.
- ☒ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☒ Assignment Papers (assignment cover sheet and assignment documents)
 - ☒ A check in the amount of \$40.00 for recording the Assignment.
 - ☐ Assignment papers filed in parent application Serial No. _____.
 - ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no. _____.
- ☐ Cancel in this application original claims _____ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
 - ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until _____.
 - ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
 - ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. _____ filed _____.

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

					Basic Fee
	Number Filed		Number Extra	Rate	\$ 760.00
Total Claims	45	-20=	25	x\$18.00	\$ 450.00
Independent Claims	4	- 3=	1	x78.00	\$ 78.00
Multiple Dependent Claims					
	[] yes		Additional Fee =	\$260.00	\$
	[X] no		Add'l Fee =	NONE	

Total: \$1,288.00

[] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ _____.


[X] A check in the amount of \$1,288.00 for payment of the application filing fees is attached.

[] Charge Fee(s) to Deposit Account No. 13-4500. Order No. _____. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

[X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4578. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

By: 
 Michael M. Murray
 Registration No 32,537

Dated: October 7, 1999

CORRESPONDENCE ADDRESS
 MORGAN & FINNEGAN, L.L.P.
 345 Park Avenue
 New York, New York 10154
 (212) 758-4800
 (212) 751-6849 Facsimile

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Masaki Okada and Keihiro Kurakata
Serial No. : TBA Group Art Unit : TBA
Filed : October 7, 1999 (Herewith)
For : ELECTRONIC DEVICE USING OPERATING SYSTEM FOR OVERALL
APPARATUS CONTROL INCLUDING MECHANICAL OPERATION

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ606947955US

Date of Deposit October 7, 1999

I hereby certify that the following attached paper(s) and/or fee
Application Fee Transmittal (in duplicate); 46 pp. of specs., 1 page of abstract, 12 Pp. claims (45 TOTAL
claims); 12 Sheets of Formal Drawings (Figs. 1-12); 6 pg. Executed Declaration/POA, check in the amount
of \$1,288.00; Assignment Recordation Form Cover Sheet w/ 2 pg. Executed Assignment; Check in the
amount of \$40.00; and return receipt postcard


is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37

C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box New

Applications, Washington, D.C. 20231.

Sandina M. Marino

Typed or printed name of person
mailing paper(s) and/or fee)


(Signature of person mailing
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

SPECIFICATION

TITLE OF THE INVENTION

5 ELECTRONIC DEVICE USING OPERATING SYSTEM FOR OVERALL
APPARATUS CONTROL INCLUDING MECHANICAL OPERATION

BACKGROUND OF THE INVENTION

10 The present invention relates to an electronic
device which uses an OS (Operating System) to perform
control, including mechanical operations, on the overall
apparatus, such as a digital camera having a collapsible
image sensing lens and a barrier to protect the image
15 sensing lens.

A controller of an electronic device such as a
digital camera performs various controls for image
sensing and the like, and performs various processing
such as file management, communication with an external
20 device, image processing and image compression. To
realize the above processing, an OS is installed in a
controller which controls the overall apparatus. In
addition, in a digital camera, as downsizing is
seriously needed, the lens is collapsible to be housed
25 within the camera main body, to improve portability.
Further, a lens-protective barrier is provided to

protect the lens.

However, in the above-described conventional art where the OS is installed in the controller that controls the overall electronic device, it takes
5 relatively long time to start the OS when the power of the electronic device is turned on.

Further, in the digital camera, it takes time for mechanical operations to open the lens-protective barrier and extend the lens to an image sensing initial
10 position. Accordingly, as it takes considerable time for the mechanical operations in addition to the above OS starting time before the camera enters an image sensing stand-by status, a user of the camera may miss a shutter release opportunity.

15

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation, and has its object
20 to provide an electronic device which quickly enters its main-operation stand-by status within a short period and a driving method for the electronic device. For example, if the electronic device is a digital camera, when the power is turned on, it quickly enters an image sensing
25 stand-by status within a short period.

According to the present invention, the foregoing

object is attained by providing an electronic device comprising: a mechanical driving member which performs mechanical operations; a first system controller which controls the overall device including the mechanical
5 driving member; and a second system controller, operating independently of the first system controller, which controls a part of the device, wherein in accordance with turning on of power supply to the first system controller, the second system controller controls
10 the mechanical driving member in parallel to a control preparatory operation for control on the overall device by the first system controller.

According to the present invention, the foregoing object is also attained by providing a method for
15 controlling an electronic device having a mechanical driving member which performs mechanical operations and a system controller which controls the overall device including the mechanical driving member, the method comprising: a preparatory step of performing a control
20 preparatory operation for control on the overall device by the system controller, in accordance with turning on of the power supply to the system controller; and a mechanical drive step of controlling the mechanical driving member in parallel to the preparatory step.

25 Other features and advantages of the present invention will be apparent from the following

description taken in conjunction with the accompanying drawings, in which like reference characters designate the same name or similar parts throughout the figures thereof.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification,
10 illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a block diagram of the arrangement of principal constituents of a digital still camera
15 according to a first embodiment of the present invention;

Fig. 2 is a flowchart of the main routine of a subsystem controller of an image processing apparatus according to the first embodiment; and

20 Figs. 3 to 5 are flowcharts of the outline of the operation of a system controller of the image processing apparatus according to the first embodiment;

Fig. 6 is an explanatory view of the task structure and control flow of an apparatus according to
25 a second embodiment of the present invention;

Fig. 7 is a timing chart of the operation of the

second embodiment;

Fig. 8 is a block diagram of the construction of the apparatus according to the second and third embodiments;

5 Fig. 9 is an explanatory view of the task structure and control flow of the apparatus according to the third embodiment of the present invention;

Fig. 10 is a timing chart of the operation of the third embodiment;

10 Fig. 11 is a timing chart of the operation of a fourth embodiment of the present invention; and

Fig. 12 is a block diagram of the construction of the apparatus according to the fourth embodiment.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

20 <First Embodiment>

Fig. 1 is a block diagram showing principal constituents and peripheral elements of a digital still camera as an electronic device according to an embodiment of the present invention. In Fig. 1, reference numeral 100 denotes an image processing apparatus; 10, an image sensing lens (or collapsible

barrel); 12, a shutter having a diaphragm function; 14,
an image sensing device which converts an optical image
into an electric signal; and 16, an A/D converter which
converts an analog signal output from the image sensing
5 device 14 into a digital signal.

Further, numeral 18 denotes a timing generator
which supplies a clock signal and a control signal
respectively to the A/D converter 16 and a D/A converter
26, under the control of a memory controller 22 and a
10 system controller 50. Numeral 20 denotes an image
processor which performs predetermined pixel
interpolation processing, color conversion processing
and the like on image data from the A/D converter 16 or
image data from the memory controller 22. The image
15 processor 20 performs predetermined calculation
processing using the image data outputted from the A/D
converter 16, and the system controller 50 performs
through-the-lens (TTL) auto focus (AF) processing, auto
exposure (AE) processing, pre-flash (EF) processing with
20 respect to an exposure controller 40 and a distance
measurement controller 42, based on the result of
calculations. Further, the image processor 20 performs
predetermined calculation using the image data outputted
from the A/D converter 16, and performs TTL auto white
25 balance (AWB) processing, based on the result of
calculations.

The memory controller 22 controls the A/D converter 16, the timing generator 18, the image processor 20, an image display memory 24, the D/A converter 26, a memory 30 and a compression/expansion circuit 32. The image data outputted from the A/D converter 16 is written into the image display memory 24 or the memory 30 via the image processor 20 and the memory controller 22, or only via the memory controller 22.

Numeral 28 denotes an image display unit comprising an LCD or the like. Image data written into the image display memory 24 is displayed on the image display unit 28 via the D/A converter 26. An electronic finder function is realized by sequentially display obtained images on the image display unit 28. Further, image display unit 28 arbitrarily turns ON/OFF its display, in accordance with an instruction from the system controller 50. If the display is turned OFF, the electric consumption of the image processing apparatus 100 can be greatly reduced.

The memory 30, used for storing obtained still images and moving images, has a sufficient storage capacity for storing a predetermined number of still images and a moving image for a predetermined period. In sequential image sensing to sequentially obtain a plural number of still images or panoramic images sensing, a

large amount of image data can be written into the memory 30 at a high speed. Further, the memory 30 may be used as a work area for the system controller 50.

The compression/expansion circuit 32 compresses or
5 expands image data by adaptive discrete cosine transformation (ADCT) or the like. The compression/expansion circuit 32 reads image data stored in the memory 30 and performs compression or expansion processing on the read image data, and writes the
10 processed data into the memory 30.

The exposure controller 40 controls the shutter 12 having the diaphragm function. The distance measurement controller 42 controls focusing of the image sensing lens 10. Numeral 44 denotes a zoom controller which
15 controls zooming of the image sensing lens 10. Numeral 46 denotes a barrier controller which controls the operation of a barrier 102 to protect the lens 10. As described above, the system controller 50 controls the exposure controller 40 and the distance measurement
20 controller 42 by the TTL method, in accordance with the result of calculations by the image processor 20 based on the image data from the A/D converter 16.

The system controller 50 controls the overall image processing apparatus 100. Numeral 52 denotes a
25 subsystem controller which controls an operation power source to the system controller 50, detects operation

key inputs, controls a liquid crystal display,
extension/collapse of the lens. If no key input
operation is made within a predetermined period, the
subsystem controller 52 turns off the power supply to
5 the system controller 50 to conserve electricity, and
thereafter, restarts the system controller 50 when a key
input operation is made.

Numeral 54 denotes a notification unit which
notifies operating statuses, messages and the like to
10 the outside by using characters, images, sound and the
like, in correspondence with execution of program by the
system controller 50. The notification unit 54 comprises
one or more combinations of display devices including an
LCD and an LED for visual notification and sound
15 generating devices for audio notification. Especially,
the display device or devices is/are provided in a
single or plural visually-recognizable positions around
an operation unit 70 of the image processing apparatus
100. Further, a part of functions of the notification
20 unit 54 is provided within an optical finder 104. To
perform the visual notification, an instruction from the
system controller 50 is transmitted to the subsystem
controller 52 by communication, and the subsystem
controller 52 controls the display device or devices in
25 accordance with the instruction.

The display contents of the notification unit 54,

displayed on the LCD or the like, include indication of
single shot/sequential image sensing, a self timer, a
compression rate, the number of recording pixels, the
number of recorded images, the number of recordable
5 images, a shutter speed, an f number (aperture),
exposure compensation, flash illumination, pink-eye
effect mitigation, macro image sensing, a buzzer-set
state, a timer battery level, a battery level, an error
state, information of plural digit numbers,
10 attached/detached status of recording media 200 and 210,
operation of communication I/F, and date and time.

Further, the display contents of the notification
unit 54, displayed within the optical finder 104,
include a focus state, a camera shake warning, a flash
15 charge state, the shutter speed, the f number (aperture),
and the exposure compensation.

Numerals 56 denotes an electrically erasable and
recordable nonvolatile memory such as an EEPROM.

Numerals 60, 62, 64 and 70 denote operation means
20 for inputting various operation instructions to the
system controller 50, comprising a single or plurality
of combinations of switches, dials, touch panels, a
device for pointing by line-of-sight detection, a voice
recognition device, and the like. The subsystem
25 controller 52 detects the operation content and
transmits the content to the system controller 50 by

communication.

Next, the operation means will be described in more detail.

Numeral 60 denotes a mode dial switch for
5 selecting various function modes such as a power OFF mode, an automatic image sensing mode, an image sensing mode, a panoramic image sensing mode, a reproduction mode, a multi-image reproduction/deletion mode, and a PC connection mode.

10 Numeral 62 denotes a shutter switch SW1 turned ON by half stroke of a shutter button (not shown), to instruct start of the operations of the AF processing, the AE processing, the AWB processing, the EF processing and the like.

15 Numeral 64 denotes a shutter switch SW2 turned ON by full stroke of the shutter button (not shown), to instruct start of a series of operations of exposure processing to write a signal read from the image sensing device 14 into the memory 30, via the A/D converter 16
20 and the memory controller 22, development processing by using calculations by the image processor 20 and the memory controller 22, and recording processing to read the image data from the memory 30, compress the image data by the compression/expansion circuit 32, and write
25 the compressed image data into the recording medium 200 or 210.

Numeral 70 denotes an operation unit comprising various buttons and touch panels including a menu button, a set button, a macro button, a multi-image reproduction/repaging button, a flash set button, a
5 single-shot/sequential/self-timer image sensing selection button, a forward (+) menu item selection button, a backward (-) menu item selection button, a forward (+) reproduction image search button, a backward (-) reproduction image search button, an image sensing
10 quality selection button, an exposure compensation button, and a date/time set button.

Next, the respective constituents connected to the image processing apparatus 100 and respective attachments will be described.

15 Numeral 80 denotes a power control switch comprising a battery detection circuit, a DC-DC converter, a switch circuit to select the block to be energized and the like. The power control switch 80 detects attached/detached state of the battery, the
20 battery type and the remaining battery power level, controls the DC-DC converter based on the results of detection and an instruction from the system controller 50, and supplies a necessary voltage to respective parts including the recording medium for the necessary period.

25 Numerals 82 and 84 denote connectors; and 86, the power source comprising a primary battery such as an

alkaline battery or a lithium battery, a secondary battery such as an NiCd battery, an NiMH battery or an Li battery, an AC adapter, and the like.

Numerals 90 and 94 denote interfaces (I/Fs) for
5 the recording media 200 and 210, such as a memory card, a hard disk and the like; and 92 and 96, connectors for connection with the recording media 200 and 210.

In the present embodiment, two systems of
10 interfaces and connectors for connection with the recording media are employed. However, the number of systems is not limited, and a single or plurality of systems interfaces and connectors may be provided. Further, interfaces and connectors pursuant to different standards may be combined.

15 As the interfaces and connectors, cards in conformity with Personal Computer Memory Card International Association standards (PCMCIA cards) and cards in conformity with compact flash (CF) card standards may be used.

20 In a case where cards and connectors in conformity with the PCMCIA standards, CF card standards and the like are used as the interfaces 90 and 94 and the connectors 92 and 96, image data and management information attached to the image data are
25 transmitted/received with respect to other peripheral devices such as a computer and a printer by connection

with various communication cards such as a LAN card, a modem card, a USB card, an IEEE 1394 card, a P1284 card, an SCSI card and a PHS card.

The barrier 102 covers the image sensing portion
5 of the image processing apparatus 100 including the lens 10, thus prevents dirt and breakage of the image sensing portion.

The optical finder 104 can be used for image sensing without the electronic finder function by the
10 image display unit 28. In the optical finder 104, realized are some of the functions of the notification unit 54 including the indication of focus state, the camera shake warning, the flash charge state, the shutter speed, the f number (aperture), the exposure
15 compensation and the like.

The recording medium 200 comprises a memory card, a hard disk or the like. The recording medium 200 has a recording unit 202 of a semiconductor memory, a magnetic disk or the like, the interface 204 for communication
20 with the image processing apparatus 100, and the connector 206 for connection with the image processing apparatus 100. Also, the recording medium 210 comprises a memory card, a hard disk or the like, and has a recording unit 212 of a semiconductor memory, a magnetic
25 disk or the like, the interface 214 for communication with the image processing apparatus 100, and the

connector 216 for connection with the image processing apparatus 100.

Next, the operation of the digital still camera according to the present embodiment will be described
5 below.

Fig. 2 is a flowchart showing the main routine of the subsystem controller 52 of the image processing apparatus 100 according to the present embodiment.

At step S101, the position of the mode dial switch
10 60 is determined. If the mode dial switch 60 is set on the power OFF mode, the process proceeds to step S102. At step S102, the display of the notification unit 54 is changed to an off status, then the image sensing lens 10 is collapsed, the barrier 102 is closed to protect the
15 image sensing portion, then necessary parameters and values including flags and control variables, and the set mode are stored into the nonvolatile memory 56. Then predetermined termination processing is performed to, e.g. cut off unnecessary power supply to the respective
20 parts of the image processing apparatus 100 including the image display unit 28, by the power control switch 80, and power supply to the system controller 50 is stopped. Then the process returns to step S101.

If it is determined at step S101 that the mode
25 dial switch 60 is set on another mode, the process proceeds to step S103, at which power supply to the

system controller 50 is started so that the system controller 50 performs processing corresponding to the selected mode. For example, if the reproduction mode is selected, image reproduction is performed, and when the processing is completed, the process returns to step S101.

Further, if it is determined at step S101 that the mode dial switch 60 is set on the image sensing mode, the process proceeds to step S104. At step S104, power supply to the system controller 50 is started, then at step S105, a timer T1 is started, and the process proceeds to step S106. At step S106, the barrier 102 is opened by the barrier controller 46, and the image sensing lens 10 is extended to an image sensing initial state (e.g., to the wide-angle side) by the zoom controller 44.

Then, at step S107, it is determined whether or not start notification has been received from the system controller 50. If the start notification has not been received, the process proceeds to step S108, at which the value of the timer T1 started at step S105 is compared with a predetermined period P1. Note that the value of the timer T1 corresponds to a period measured since applying power supply to the system controller 50. If the value of the timer T1 is longer than the predetermined period P1, the process proceeds to step

S109, while if the value of the timer T1 is not longer than the predetermined period P1, the process returns to step S107. Note that the predetermined period P1 is longer than the time necessary to get the OS ready in the system controller 50.

Next, at step S109, the image sensing lens 10 is collapsed by the zoom controller 44, and the barrier 102 is closed by the barrier controller 46. Then the power to the system controller 50 is terminated at step S110, and the process ends.

Further, if it is determined at step S107 that the start notification has been received from the system controller 50, the process proceeds to step S111, at which a timer T2 is started, then the process proceeds to step S112. At step S112, it is determined whether or not a key input operation has been made from the mode dial switch 60, the shutter switch 62 (SW1), the shutter switch 64 (SW2) or the operation unit 70. If it is determined that a key input operation has been made, the process proceeds to step S113, at which the timer T2 is reset, and the process proceeds to step S114.

At step S114, the value of the timer T2 is compared with a predetermined period P2. If the value is not longer than the predetermined period P2, the process returns to step S112, while if the value is longer than the predetermined period P2, the process proceeds to

step S109. As described above, the image sensing lens 10
is collapsed by the zoom controller 44, and the barrier
102 is closed by the barrier controller 46. Then the
power to the system controller 50 is terminated at step
5 S110. Then the process ends.

Note that the predetermined period P2 compared
with the value of the timer T2 is set to 1 to 10 minutes
based on the battery level detected by the power control
switch 80. If the battery level is sufficiently high,
10 the predetermined period P2 is set to 10 minutes. If the
battery level is at a lower limit for image sensing, the
predetermined period P2 is set to 1 minute. If the
battery power is at an intermediate level, the
predetermined period P2 is set in accordance with the
15 level.

Further, by changing settings by the operation
unit 70, the comparison between the value of the timer
T2 and the predetermined period P2 at step S114 may be
omitted so as to omit the operations at step S109 and
20 S110.

Next, the outline of the operation of the system
controller 50 will be described with reference to the
flowcharts of Figs. 3 to 5.

When the power is supplied by the subsystem
25 controller 52 (corresponding to step S104 in Fig. 2),
the hardware of the system controller 50 is initialized,

and at step S201, the OS is started. The OS checks an internal memory area for the system, and searches file names, the number of files, the data amounts of the respective files, the relation among the files and the like, in an external memory area. Then the OS forms a table for management of the files and the memory. Thereafter, at step S202, a system control program is loaded and started. In the system control program, flags and control variables and the like are initialized, and start notification is transmitted to the subsystem controller 52 at step S203.

Next, at step S204, the state of the mode dial switch 60, read via the subsystem controller 52, is determined (corresponding to step S101 in Fig. 2). If the mode dial switch 60 is set on the image sensing mode, the process proceeds to step S206. If the mode dial switch 60 is set on another mode, the process proceeds to step S205, and processing corresponding to the selected mode is performed. When the processing has been completed, the process returns to step S204.

At step S206, it is determined whether or not there is a problem in the operating status of the recording medium 200 or 210 in response to the operation of the image processing apparatus 100, especially in image data recording/reproduction operation. If it is determined that the operating status has a problem (YES

at step S206), the process proceeds to step S207, at which a predetermined warning by an image and/or voice message is issued by using the notification unit 54, via the subsystem controller 52. Then the process returns to
5 step S204.

If there is no problem in the operating status of the recording medium 200 or 210 (NO at step S206), the process proceeds to step S208, at which various settings of the image processing apparatus 100 are indicated by
10 an image and/or voice message by using the notification unit 54, via the subsystem controller 52. Note that if the image display unit 28 is ON, the various settings of the image processing apparatus 100 may be displayed as an image on the image display unit 28.

15 Note that in the image sensing mode, the electronic finder function by the image display unit 28 is realized by sequentially displaying data, sequentially written into the image display memory 24 through the image sensing device 14, the A/D converter
20 16, the image processor 20 and the memory controller 22, on the image display unit 28, via the memory controller 22 and the D/A converter 26 (through display status).

When the indication of the settings at step S208 has been completed, the process proceeds to step S209 in
25 Fig. 4, where it is determined whether or not the shutter switch 62 (SW1) has been depressed. If it is

determined that the shutter switch 62 (SW1) has not been depressed, the process returns to step S204 in Fig. 3. If it is determined that the shutter switch 62 (SW1) has been depressed, the process proceeds to step S210, at
5 which distance measurement processing is performed, to adjust the focus of the image sensing lens 10 to obtain a sharp image of an object. Further, photometry is performed so as to determine the f value (aperture) and the shutter speed. Further, flash is set if it is
10 determined from the photometry that flash illumination is necessary. As the distance measurement processing and the photometry processing do not particularly relate to the subject matter of the present invention, the detailed explanations of these processings will be
15 omitted.

Thereafter, at step S211, the state of an image display flag stored in the internal memory of the system controller 50 is determined. (This memory is used for storing information from the operation unit 70 read via
20 the subsystem controller 52. The memory may be provided as an internal memory of the subsystem controller 52, however, the location of the memory used for the information from the operation unit 70 does not particularly relate to the subject matter of the present
25 invention, accordingly, only the internal memory of the system controller 50 is described here.) If the image

flag is turned on, the display status of the image display unit 28 is set to the through display status at step S212. Then the process proceeds to step S213.

If the shutter switch 64 (SW2) has not been depressed (NO at step S213), and the shutter switch 62 (SW1) has been released (NO at step S214), the process returns to step S204. On the other hand, if the shutter switch 64 (SW2) has been depressed (YES at step S213), the state of the image display flag stored in the internal memory of the system controller 50 is determined at step S215. If the image display flag is turned on, the display status of the image display unit 28 is set to fixed-color display status at step S216.

In the fixed-color display status, in place of image data being written into the image display memory 24 via the image sensing device 14, the A/D converter 16, the image processor 20 and the memory controller 22, fixed-color image data is displayed on the image display unit 28 via the memory controller 22 and the D/A converter 26. Thus, a fixed color image is displayed on the electronic finder.

When the display status of the image display unit 28 has been set to the fixed-color display status at step S216, the process proceeds to step S217. Further, if it is determined at step S215 that the image display flag is not turned on, the process directly proceeds to

the step S217.

At step S217, image sensing processing is performed through the exposure processing to write obtained image data into the memory 30 via the image sensing device 14, the A/D converter 16, the image processor 20 and the memory controller 22 or via the A/D converter 16 and the memory controller 22, and the development processing to read the image data from the memory 30 and perform various processing by using the memory controller 22 and the image processor 20 in accordance with necessity.

Since the image sensing processing at step S217 does not relate to the subject matter of the present invention, the detailed explanation of this processing will be omitted.

When the image data read out from the memory 30 has been subjected to the various processing by using the memory controller 22 and the image processor 20 in accordance with necessity and subjected to image compression processing by using the compression/expansion circuit 32 in correspondence with the set mode, the recording processing is performed to write the image data into the recording medium 200 or 210 (step S218). Note that the recording processing does not relate to the subject matter of the present invention, the detailed explanation of the processing

will be omitted.

Thereafter, the process proceeds to step S219, at which the state of the image display flag stored in the internal memory of the system controller 50 is
5 determined. If the image display flag is on, the process proceeds to step S220, at which the currently recorded image is displayed on the image display unit 28 as quick review display.

Then it is determined at step S221 whether or not
10 the shutter switch 64 (SW2) is being depressed. In a case where the image display flag is on, the quick review display on the image display unit 28 may be continued until the shutter switch 64 (SW2) is released.

Further, if the shutter switch 64 (SW2) has been
15 released (NO at step S221), the process proceeds to step S222 at which it is determined whether or not the image display flag is on. If the image display flag is on, the display status of the image display unit 28 is set to the through display status at step S223, and the process
20 proceeds to step S224. In the above operation, if the image display flag is on, an obtained image can be checked by the quick review display on the image display unit 28, and the through display status to sequentially display obtained image data can be set for the next
25 image sensing.

If it is determined at step S222 that the image

display flag is not on and the through display status is set at step S223, the process proceeds to step S224, at which it is determined whether or not the shutter switch 62 (SW1) has been depressed. If it is determined that the shutter switch 62 has been depressed, the process returns to step S210 in Fig. 4, in preparation for the next image sensing. If it is determined that the shutter switch 64 (SW1) is released, the process returns to step S204 in Fig. 3 without execution of the series of image sensing operation.

As described above, in the digital still camera according to the present embodiment, comprising the system controller 50 to control the overall system and the subsystem controller 52 to control the lens-protective barrier and the lens, as constituents, when power supply to the system controller 50 is turned on, the lens-protective barrier is opened and the lens is extended to the image sensing initial position. Thus, the digital still camera quickly enters the image sensing stand-by status within a short period.

Note that the subsystem controller 52 of the present embodiment has a reduced processing speed so as to reduce electric consumption, such that it shares a role clearly different from that of the system controller 50 as a high-speed and high power-consuming element. When the digital still camera is not

operational, the system controller 50 is turned off so as to lower the system electric consumption. When the digital still camera operates, the system controller 50 with a high processing speed is operated for high speed processing. Thus the reduction of electric consumption and high speed processing can be realized.

Further, in the present embodiment, the operation of the subsystem controller 52 described with reference to the flowchart of Fig. 2 is realized by the CPU, however, the operation may be realized by a hard-wired logic circuit or the like. In such a case, the hard-wired logic circuit basically transmits the respective operations of the operation means 60, 62, 64 and 70 to the system controller 50 so that the system controller 50 determines the operation with respect to the operations of the operation means. The hard-wired logic circuit receives instructions for control and indication from the system controller 50, and controls the lens, the barrier, the power source and the display in accordance with the instructions.

Note that only when the mode dial switch 60 is switched from the power OFF mode to another mode, and if the system controller 50 has returned from power down processing (so-called auto shut-off processing) since no operation input was made from the respective operation means 60, 62, 64 and 70 for a predetermined period (i.e.,

if power supply to the system controller 50 is
restarted), the barrier 102 is opened, and the collapsed
image sensing lens 10 is extended to the image sensing
initial position. In this case, in correspondence with
5 the turning on of power supply to the system controller
50, signals are outputted to the barrier controller 46
and the zoom controller 44 only during a period
necessary to open the barrier and extend the collapsed
lens to the predetermined position (in a case where
10 actuators to open the barrier and drive the lens are
pulse motors).

Further, if the subsystem controller 52 comprises
a CPU, the subsystem controller 52 can detect whether or
not the operations to open the barrier and extend the
15 lens to the initial position have been normally
completed. If the subsystem controller 52 comprises a
hard-wired logic circuit, the construction can be
simplified by arranging such that the system controller
50 detects whether or not the opening and moving
20 operations of the barrier and the lens have been
normally completed after the system controller 50 has
been started.

Further, in a case where the subsystem controller
52 comprises a CPU as described above, upon auto shut-
25 off processing, the barrier is closed under the control
of the subsystem controller 52. However, if the

subsystem controller 52 comprises a hard-wired logic circuit, the construction of the subsystem controller 52 can be simplified by arranging such that the closing operation with respect to the barrier is performed by
5 the system controller 50.

As described above, according to the above embodiment, as mechanical preparation operations are performed in parallel with the start of the OS, the apparatus quickly enters a main-operation stand-by
10 status within a short period. For example, in case of digital still camera, it can quickly enters an image sensing stand-by status.

<Second Embodiment>

15 Fig. 6 is an explanatory view showing the task structure and control flow of a digital camera according to a second embodiment of the present invention. Fig. 7 is a timing chart showing the operation from image sensing to file accessible state according to the
20 present embodiment. Fig. 8 is a block diagram showing the system configuration of the digital camera as an image sensing device according to the present embodiment.

In Fig. 8, a lens unit 830 and a flash unit 840 are removably attached to the image sensing device.

25 When the power source switch 800 is turned on, the central processing unit (CPU) 801 for system control and

file system control starts, and the CPU 801 turns on power supply to the respective blocks by a power source controller 850.

The CPU 801 simultaneously starts initialization
5 of electrical components to perform signal processing, including an image processor 802 which performs image processing control, compression/expansion control, memory control and the like, an image memory 808, an image display/video output unit 811, and the like,
10 initialization of mechanical components including an exposure controller 820, a distance measurement controller 821, a zoom controller 822, a shutter controller 823, a mirror controller 824, a dimming controller 825 and the like, initialization of a storage
15 medium interface 812 and a storage medium 813, and initialization of a file system constructed on the storage medium 813.

In the present system configuration, the above-described initialization of the electrical components
20 and the initialization of the mechanical components are completed within a short period (See mechanical components initialization task 103 and electrical components initialization task 104 in Fig. 7).

When the initialization of the electrical
25 components and the initialization of the mechanical components have been completed, the operation switch 814

and the shutter switch 815 become active before the initialization of the file system is completed. Further, the zoom operation member 831 also becomes active at this time. When the user operates the zoom operation
5 member 831, focal length change is notified via the zoom controller 822, and the CPU 801 drives a lens group 832 by the zoom controller 822.

When the shutter switch 815 is operated and a switch SW1 is turned on, the CPU 801 starts preparation
10 for image sensing. The CPU 801 instructs the exposure controller 820 to obtain the current photometry information from a photometry sensor 817 and to calculate an exposure value. Further, the CPU 801 causes the distance measurement controller 821 to drive the
15 lens group 832 while determining a focal position based on information from a distance measurement sensor 818.

Next, when the shutter switch 815 is operated and a switch SW2 is turned on, to perform actual image sensing, the CPU 801 drives the image processor 802 and
20 a timing generator 803, and starts to control an A/D converter 804 and an image sensing device 805. Further, the CPU 801 controls the main mirror 807 by the mirror controller 824, controls an aperture 833 in correspondence with the current exposure value by the
25 exposure controller 820, and performs shutter control to perform speed control on a shutter 806 in correspondence

with the current exposure value, and further, controls drive of the flash unit 840 by the dimming controller 825 in accordance with necessity (flash illumination), so that the image sensing device 805 is exposed.

5 After the exposure of the image sensing device 805, electric charge accumulated at the image sensing device 805 is sequentially read and transmitted to the image processor 802 as digital image data in accordance with timing signals generated by the timing generator 803
10 (via the A/D converter 804). The image processor 802 performs development processing and compression processing on the image data read from the image sensing device 805, and temporarily stores the processed image data in the image memory 808. The image data temporarily
15 stored in the image memory 808 can be viewed by using the image display/video output unit 811. Further, if the initialization of the file system has not been completed at this time, the image data is still stored in the image memory 808.

20 When the shutter switch 815 (switch SW1 or SW2) is operated next, the above control is repeated, and image sensing operation is performed until the image memory 808 is filled with image data.

 If the initialization of the file system is
25 completed when the image data is stored in the image memory 808, immediately the image data stored in the

image memory 808 is written to the storage medium 813.
When the writing is completed, the image data stored in
the image memory 808 becomes invalid, and the area where
the image data has been stored is used as an available
5 area for next image sensing.

The image data writing is repeated as long as
image data exists in the image memory 808 and the
storage medium 813 has available space. Further, if the
shutter switch 815 (switch SW1 or SW2) is operated while
10 image data is being written in the storage medium, the
image sensing operation is performed in parallel with
the image writing.

Next, referring to Fig. 6, numeral 101 denotes an
initial task which starts the entire system. The initial
15 task 101 performs initialization to start the system,
starts a task group constituting the system, and starts
a system start task 102.

The system start task 102 issues a mechanical
component initialization request to the mechanical
20 component initialization task 103 which initializes the
mechanical components, issues an electrical component
initialization request to the electrical component
initialization task 104 which initializes the electrical
components, and issues a file system initialization
25 request to a file system initialization task 105 to
obtain information to store a file into a storage medium

813, from the storage medium 813.

A switch monitoring task 106 waits for an image sensing start instruction from the user. The switch monitoring task 106 does not start to monitor image sensing start instruction until it receives initialization completion notification from the mechanical component initialization task 103 and that from the electrical component initialization task 104. That is, in Fig. 7, at a point 204 where initialization completion notification 201 from the mechanical component initialization task 103 and initialization completion notification 202 from the electrical component initialization task 104 have been received, an image sensible status is obtained.

After the point 204 where the above-described image sensible status is obtained, the switch monitoring task 106 waits for an image sensing instruction, and in accordance with an image sensing instruction 205 by the user's operation, issues an image sensing request to an image sensing control task 107. The image sensing control task 107 enters an image sensing in-processing state 206, and issues a mechanical component control request for image sensing operation to a mechanical component control task 108, so as to control the mechanical components for AF operation, lens drive, aperture drive, shutter drive and the like.

Further, the image sensing control task 107 issues an electrical component control request for image sensing operation to an electrical component control task 109, so as to control the electrical components including the image sensing device, the A/D converter, a digital signal processor, storage means and the like. Upon reception of image sensing completion notification from the mechanical component control task 108 and that from the electrical component control task 109, the image sensing control task 107 issues an image data file request 207 to a file system control task 110.

The file system control task 110 receives the image data file request 207, and stores the request, as a request in a pending state, into temporary storage means during a period between the reception of the request and reception of initialization completion notification 203 from the file system initialization task 105 (from points 204 to 208 in Fig. 7). The file system control task 110 receives the initialization completion notification 203 from the file system initialization task 105, and stores image data obtained by image sensing as a file into the storage medium (209), in accordance with the image data file request 207 in the pending state.

It is necessary for the switch monitoring task 106 to receive the initialization completion notification

from the mechanical component initialization task 103
and that from the electrical component initialization
task 104 in order to enter the image sensible state.
Actually, in comparison between the period necessary for
5 the initialization of the mechanical components and the
period necessary for the initialization of the
electrical components, the longer of these periods is
determined as the period necessary for obtaining the
image sensible status.

10 In the second embodiment, the initialization of
the mechanical components and the initialization of the
electrical components are completed within a
comparatively short period, and it is not necessary to
wait for the initialization completion notification 203
15 from the file system initialization task 105.
Accordingly, the period necessary for obtaining the
image sensible status can be reduced.

<Third Embodiment>

20 Fig. 9 is an explanatory view showing the task
structure and control flow according to a third
embodiment of the present invention. Fig. 10 is a timing
chart showing the operation from image sensing upon
storage medium exchange to acquisition of file
25 accessible state according to the present embodiment.
Note that the system configuration of the image sensing

device of the present embodiment is the same as that shown in Fig. 8.

Referring to Fig. 9, numeral 501 denotes an initial task which starts the entire system. The initial
5 task 501 performs initialization to start the system, starts a task group constituting the system, and starts a system start task 502.

The system start task 502 issues a mechanical component initialization request to the mechanical
10 component initialization task 503 which initializes the mechanical components, issues an electrical component initialization request to the electrical component initialization task 504 which initializes the electrical components, and issues a file system initialization
15 request to a file system initialization task 505 to obtain information to store a file into the storage medium 813, from the storage medium 813.

A switch monitoring task 506 waits for an image sensing start instruction from the user and detection of
20 storage medium exchange. The switch monitoring task 506 does not start to monitor image sensing start instruction until it receives initialization completion notification from the mechanical component initialization task 503 and that from the electrical
25 component initialization task 504. That is, at a point where the initialization completion notification from

the mechanical component initialization task 503 and the initialization completion notification from the electrical component initialization task 504 have been received, the image sensible status is obtained.

5 Further, when the initialization by the file system initialization task 505 has been completed, the file system initialization task 505 issues initialization completion notification to a file system control task 510. The file system control task 510
10 enters a file accessible state.

 In Fig. 10, when the switch monitoring task 506 detects exchange operation 601 of exchange of the storage medium 813 by the user, the switch monitoring task 506 issues storage medium exchange notification 602
15 to the file system initialization task 505 and the file system control task 510.

 The file system initialization task 505 receives the storage medium exchange notification 602, and to read information on the storage medium (storage medium
20 type, entire capacity of the storage medium, the capacity in current use, current available capacity, the file format, current latest file information and the like) directly from the storage medium, enters file system initialization in-execution state 610.

25 Further, the file system control task 510 enters a file inaccessible state. That is, from an operation

point 603 of the storage medium exchange operation 601,
the file system control task 510 enters the file system
in-initialization/file inaccessible/image sensible state.

After the storage medium exchange operation point
5 603, an image sensing request by the user's operation is
issued to the image sensing control task 507. The image
sensing control task 507 enters an image sensing in-
processing state 605, and issues a mechanical component
control request for image sensing operation to a
10 mechanical component control task 508, so as to control
the lens, the aperture and the shutter. Further, the
image sensing control task 507 issues an electrical
component control request for image sensing operation to
an electrical component control task 509, so as to
15 control the image sensing device, the A/D converter, the
digital signal processor and the storage means.

Upon reception of image sensing completion
notification from the mechanical component control task
508 and that from the electrical component control task
20 509, the image sensing control task 507 issues an image
data file request 606 to the file system control task
510. The file system control task 510 receives the image
data file request 606, and stores the request, as a
request in a pending state, into temporary storage means
25 during a period between the reception of the request and
reception of initialization completion notification 607

from the file system initialization task 505 (from points 603 to 608 in Fig. 10).

The file system control task 510 receives the initialization completion notification 607 from the file system initialization task 505, and stores image-sensed data as a file into the storage medium (609), in accordance with the image data file request 606 in the pending state.

As described above, according to the third embodiment, image sensing can be performed even while the file system is being initialized due to storage medium exchange, by the operations of the mechanical component control and the electrical component control.

<Fourth Embodiment>

Fig. 11 is a timing chart showing the operation from image sensing for acquisition of file accessible state according to a fourth embodiment of the present invention. Fig. 12 is a block diagram showing the system configuration of the digital camera as the image sensing device according to the fourth embodiment. Note that the task structure and control flow of the present embodiment are the same as those in Fig. 6, the detailed explanations of the task structure and the control flow will be omitted.

In Fig. 12, the digital camera incorporates a

flash unit 919, and has a collapsible lens 916 and a lens barrier 917 to protect the lens.

When a power source switch 900 is turned on, a CPU 901 for system control and file system control starts, and the CPU 901 turns on power supply to the respective blocks by a power source controller 930. The CPU 901 simultaneously starts initialization of electrical components including an image processor 902 which performs image processing control, image compression/expansion control, memory control and the like, an image memory 907, an image display/video output unit 910, and the like, initialization of mechanical components including an exposure controller 920, a distance measurement controller 921, a zoom controller 922 and a barrier controller 923, initialization of a storage medium interface 911 and a storage medium 912, and initialization of a file system constructed on the storage medium 912.

In the present system configuration, the initialization of the electrical components is completed within a short period (See a mechanical component initialization task 104 in Fig. 11).

Upon initialization of the mechanical components, the barrier controller 923 opens the lens barrier 917, and in this state, the distance measurement controller 921 and the zoom controller 922 extend the lens group

916 to a predetermined position.

The exposure controller 920 moves a shutter and an aperture 906 to predetermined positions (See a mechanical component initialization task 103 in Fig. 11).

5 When the initialization of the electrical components and the initialization of the mechanical components have been completed, an operation switch 913 and a switch SW1 of a shutter switch 914 become active before the initialization of the file system is completed.

10 Further, when the user operates a zoom operation member of the operation switch 913, the CPU 901 drives the lens group 916 and an optical finder 918 by the zoom controller 922.

When the switch SW1 of the shutter switch 914 is
15 turned on, the CPU 901 starts preparation for image sensing. The CPU 901 drives the image processor 902, a timing generator 903, an A/D converter 904 and an image sensing device 905, controls an aperture 906 by the exposure controller 920, to expose the image sensing
20 device 905. When the image sensing device 905 is exposed, electric charge accumulated at the image sensing device 905 is sequentially read and transmitted to the image processor 902 as digital image data by the timing generator 903 and the A/D converter 904.

25 The image processor 902 performs image processing on the image data read from the image sensing device 905,

and stores the processed image data in the image memory 907. The image data stored in the image memory 907 can be viewed by using an image display/video output unit 910. Further, if the optical finder 918 is used, the
5 image data cannot be written into the image memory 907 and the image data cannot be viewed on the image display/video output unit 910.

Further, the distance measurement controller 921 drives the lens group 916 while determining the focal
10 position based on information from the image processor 902 and a distance measurement sensor. In this state, when the switch SW2 of the shutter switch 914 is turned ON, image sensing can be immediately performed.

When the initialization of the file system has
15 been completed, the switch SW2 of the shutter switch 914 also becomes active, thus all the switches are active.

When the switch SW2 of the shutter switch 914 is turned on, as the distance measurement has been completed and the mechanical elements of the optical
20 system such as the lens group 916 is in the focal position, the CPU 901 immediately performs image sensing. The CPU 901 drives the image processor 902, the timing generator 903, the A/D converter 904, the image sensing device 905, and controls the aperture 906 by the
25 exposure controller 920, to expose the image sensing device 905.

After the exposure of the image sensing device 905,
electric charge accumulated at the image sensing device
905 is sequentially read and transmitted to the image
processor 902 as digital image data via the A/D
5 converter 904 in accordance with timing signals
generated by the timing generator 903 and the A/D
converter 904. The image processor 902 performs
development processing and compression processing on the
image data read from the image sensing device 905, and
10 temporarily stores the image data into the image memory
907. The image data temporarily stored in the image
memory 907 can be viewed by the image display/video
output unit 910.

The image data stored in the image memory 907 is
15 immediately written into the storage medium 912. When
the writing has been completed, the image data stored in
the image memory 907 becomes invalid, and the area where
the image data has been stored is used as an available
area for next image sensing. Further, when the image
20 data is written into the storage medium, if the shutter
switch 914 (switch SW1 or SW2) is operated, image
sensing is performed in parallel to the image writing.

As described above, according to the fourth
embodiment, during the file system initialization
25 processing, the optical mechanical components are
operated to perform the lens-zoom operation, the AF

operation and the AE operation. Thus, even if image sensing is instructed immediately after the completion of file system initialization, the image sensing operation (the aperture control, the shutter control and
5 the image sensing control) can be immediately performed.

Note that in the above second to fourth embodiments, a plurality of microcomputers may be used as the controller to simultaneously perform the mechanical component initialization operation, the
10 electrical component initialization operation and the file system initialization operation.

Further, to simultaneously perform the above respective initialization operations, a realtime multi-task monitoring system using interrupt processing from
15 the respective initialization operation may be employed.

Further, to simultaneously perform the above respective initialization operations, the mechanical component initialization operation and the electrical component initialization operation may be performed
20 during idle time in data transfer from the storage medium by DMA (Direct Memory Access) upon file system initialization operation.

Further, to simultaneously perform the above respective initialization operations, the mechanical
25 component initialization operation and the electrical component initialization operation may be performed by

time-division processing.

Further, the object of the present invention can also be achieved by providing a storage medium storing program code for performing the aforesaid processes to a
5 computer system or apparatus (e.g., a personal computer), reading the program code, by a CPU or MPU of the computer system or apparatus, from the storage medium, then executing the program.

In this case, the program code read from the
10 storage medium realizes the functions according to the embodiment, and the storage medium storing the program code constitutes the invention.

Further, the storage medium, such as a floppy disk, a hard disk, an optical disk, a magneto-optical disk, a
15 CD-ROM, a CD-R, a magnetic tape, a nonvolatile type memory card, and a ROM can be used for providing the program code.

Furthermore, besides aforesaid functions according to the above embodiment are realized by executing the
20 program code which is read by a computer, the present invention includes a case where an OS or the like working on the computer performs a part or entire processes in accordance with designation of the program code and realizes functions according to the above
25 embodiment.

Furthermore, the present invention also includes a case where, after the program code read from the storage medium is written in a function expansion card which is inserted into the computer or in a memory provided in a function expansion unit which is connected to the computer, a CPU or the like contained in the function expansion card or unit performs a part or entire processes in accordance with designation of the program code and realizes functions of the above embodiment.

10 In a case where the present invention is applied to the aforesaid storage medium, the storage medium stores program code corresponding to the flowcharts in Figs. 3 to 5 described in the first embodiment and the task structures shown in Figs. 6 and 9 described in the second to fourth embodiments.

The present invention is not limited to the above embodiments and various changes and modifications can be made within the spirit and scope of the present invention. Therefore, to apprise the public of the scope of the present invention, the following claims are made.

WHAT IS CLAIMED IS:

1. An electronic device comprising:
 - a mechanical driving member which performs mechanical operations;
 - 5 a first system controller which controls the overall device including said mechanical driving member; and
 - a second system controller, which controls a part of the device, operating independently of said first
 - 10 system controller,
 - wherein in accordance with turning on of power supply to said first system controller, said second system controller controls said mechanical driving member in parallel to a control preparatory operation
 - 15 for control on the overall device by said first system controller.
2. The electronic device according to claim 1, wherein said first system controller is a central
- 20 processing unit, and wherein in said control preparatory operation, immediately after turning on of the power supply to said first system controller, said first system controller starts an OS (Operation System), and operates a control application program.
- 25
3. The electronic device according to claim 1,

wherein if the completion of the control preparatory operation has not been notified within a predetermined period from said first system controller since the turning on of the power supply to said first system controller, said second system controller returns said first system controller to a status before the power supply was turned on to said first system controller, and turns off the power supply to said first system controller.

10

4. The electronic device according to claim 1, wherein said predetermined period is longer than a period from turning on of the power supply to said first system controller to normal completion of the control preparatory operation by said first system controller.

15

5. The electronic device according to claim 1, further comprising an operation unit which inputs an operation instruction to the electronic device,

20

wherein if no operation instruction has been inputted by said operation unit within a predetermined period, said second system controller returns said mechanical driving member to a status before the power supply was turned on to said first system controller, and turns off the power supply to said first system controller.

25

6. The electronic device according to claim 1,
wherein said second system controller is a central
processing unit and is always powered.

5

7. The electronic device according to claim 6,
wherein said second system controller controls the power
supply to said first system controller.

10 8. The electronic device according to claim 1,
wherein said second system controller is a hard-wired
logic circuit.

9. The electronic device according to claim 1,
15 wherein said first system controller has a processing
speed faster than that of said second system controller.

10. The electronic device according to claim 1,
wherein electric consumption of said second system
20 controller is lower than that of said first system
controller.

11. The electronic device according to claim 1,
wherein the electronic device is a digital still camera.

25

12. The electronic device according to claim 11,

wherein said mechanical driving member includes a lens barrier which protects the optical system of the digital still camera.

5 13. The electronic device according to claim 12, wherein said second system controller opens said lens barrier in parallel to the control preparatory operation on the overall device by said first system controller.

10 14. The electronic device according to claim 11, wherein said mechanical driving member includes a collapsible barrel of the digital still camera.

15 15. The electronic device according to claim 14, wherein said second system controller extends said collapsible barrel in parallel to the control preparatory operation on the overall device by said first system controller.

20 16. The electronic device according to claim 1, wherein the electronic device has an in-use status and a non-use status different from each other, and wherein said second system controller controls said mechanical driving member in parallel to the control preparatory
25 operation on the overall device by said first system controller, so as to cause the device to enter the in-

use status from the non-use status.

17. The electronic device according to claim 16,
wherein the electronic device is a digital still camera
5 and comprises an image sensing lens as said mechanical
driving member.

18. The electronic device according to claim 17,
wherein when the device is not used, the device is in an
10 image sensing disabled status in which said image
sensing lens is collapsed into a camera main body.

19. The electronic device according to claim 17,
wherein when the device is used, the device is in an
15 image sensing enabled status in which said image sensing
lens is extended from a camera main body to a wide-angle
side position.

20. The electronic device according to claim 17,
20 wherein said mechanical driving member includes a lens
barrier which protects said image sensing lens.

21. The electronic device according to claim 20,
wherein when the device is used, the device is in an
25 image sensing enabled status in which the lens barrier
which protects said image sensing lens is opened.

22. The electronic device according to claim 20,
wherein when the device is not used, the device is in a
image sensing disabled status in which the lens barrier
5 which protects said image sensing lens is closed.

23. A method for controlling an electronic device
having a mechanical driving member which performs
mechanical operations and a system controller which
10 controls the overall device including said mechanical
driving member, said method comprising:
a preparatory step of performing a control
preparatory operation for control on the overall device
by said system controller, in accordance with turning on
15 of power supply to said system controller; and
a mechanical drive step of controlling said
mechanical driving member in parallel to said
preparatory step.

24. The method according to claim 23, wherein said
system controller is a central processing unit, and
wherein at said preparatory step, an OS (Operating
System) is started and a control application program is
operated after turning on of the power supply to said
25 system controller.

25. The method according to claim 23, further comprising:

a step of returning said mechanical driving member to a status before the power supply was turned on to said system controller if the completion of the control preparatory operation has not been notified from said system controller within a predetermined period since turning on of power supply to said system controller; and

10 a step of turning off the power supply to said system controller.

26. The method according to claim 23, wherein said predetermined period is longer than a period from turning on of power supply to said system controller to normal completion of the control preparatory operation by said system controller.

27. The method according to claim 23, wherein the electronic device further comprises an operation unit which inputs an operation instruction to the electronic device,

the method further comprising:

a step of returning said mechanical driving member to a status before the power supply was turned on to said system controller if no operation instruction has

been inputted within a predetermined period; and

a step of turning off the power supply to said system controller.

5 28. The method according to claim 23, wherein the electronic device is a digital still camera.

29. The method according to claim 28, wherein said mechanical driving member includes a lens barrier which
10 protects an optical system of the digital still camera, and wherein at said mechanical drive step, said lens barrier is opened.

30. The method according to claim 28, wherein said
15 mechanical driving member includes a collapsible barrel of the digital still camera, and wherein at said mechanical drive step, said collapsible barrel is extended.

20 31. The method according to claim 23, wherein the electronic device has an in-use status and a non-use status different from each other, and wherein at said mechanical drive step, control to cause the device to enter the in-use status from the non-use status is
25 performed.

32. The method according to claim 31, wherein the electronic device is a digital still camera, and comprises an image sensing lens as said mechanical driving member.

5

33. The method according to claim 32, wherein when the electronic device is not used, the device is in the non-use status in which said image sensing lens is collapsed in a camera main body.

10

34. The method according to claim 32, wherein when the electronic device is used, the device is in the in-use status in which said image sensing lens is extended from a camera main body to a wide-angle side position.

15

35. The method according to claim 32, wherein said mechanical driving member includes a lens barrier which protects said image sensing lens.

20 36. The method according to claim 35, wherein when the electronic device is used, the device is in the in-use status in which the lens barrier which protects said image sensing lens is opened.

25 37. The method according to claim 35, wherein when the electronic device is not used, the device is in the non-

use status in which the lens barrier which protects said image sensing lens is closed.

38. A computer program product comprising a computer
5 usable medium having computer readable program code
means embodied in said medium for controlling an
electronic device having a mechanical driving member
which performs mechanical operations and a system
controller which controls the overall device including
10 said mechanical driving member, said product including:

first computer readable program code means of
preparatory step for performing a control preparatory
operation for control on the overall device by said
system controller, in accordance with turning on of
15 power supply to said system controller; and

second computer readable program code means of
mechanical drive step for controlling said mechanical
driving member in parallel to said preparatory step.

20 39. The computer program product according to claim 38,
wherein the electronic device has an in-use status and a
non-use status different from each other, and wherein at
said mechanical drive step, control to cause the device
to enter the in-use status from the non-use status is
25 performed.

40. An image sensing apparatus comprising:

image sensing means for converting an optical image of an object to electric signals and outputting the electric signals;

5 mechanical drive means for driving a mechanical component of the image sensing apparatus;

signal processing means for generating image signals by processing the electric signals outputted from said image sensing means;

10 file system means for storing the image data generated by said signal processing means to a storage medium; and

control means for simultaneously starting initialization of said mechanical drive means, said
15 signal processing means, and said file system means in response to turning on of the image sensing apparatus.

41. The image sensing apparatus according to claim 40, wherein initialization of said file system
20 means controlled by said control means includes an operation of obtaining information on said storage medium from said storage medium.

42. The image sensing apparatus according to
25 claim 41, wherein the information in said storage medium includes at least one of storage medium type, entire

capacity of the storage medium, capacity in current use, current available capacity, the file format, current latest file information.

5 43. The image sensing apparatus according to claim 40, wherein said mechanical drive means includes at least either of a lens drive unit or a exposure drive unit.

10 44. The image sensing apparatus according to claim 40, wherein said control means adopts by a real time multi task monitoring system for performing various initialization operation.

15 45. The image sensing apparatus according to claim 41, wherein said control means simultaneously performs the initialization by performing data transmission from said storage medium by said file system means at the initialization by direct memory
20 access (DMA), and performing initialization of said mechanical drive means and signal processing means during idle time of the DMA.

ABSTRACT OF THE DISCLOSURE

A control method for an electronic device such as a digital camera, having a mechanical driving member comprising a collapsible barrel, a lens barrier and the like, which performs mechanical operations, and a system controller which controls the overall device including the mechanical driving member is provided. In accordance with turning on of power supply to the system controller, the mechanical driving member is driven until the device enters a main-operation stand-by status, in parallel to start of an OS by the system controller.

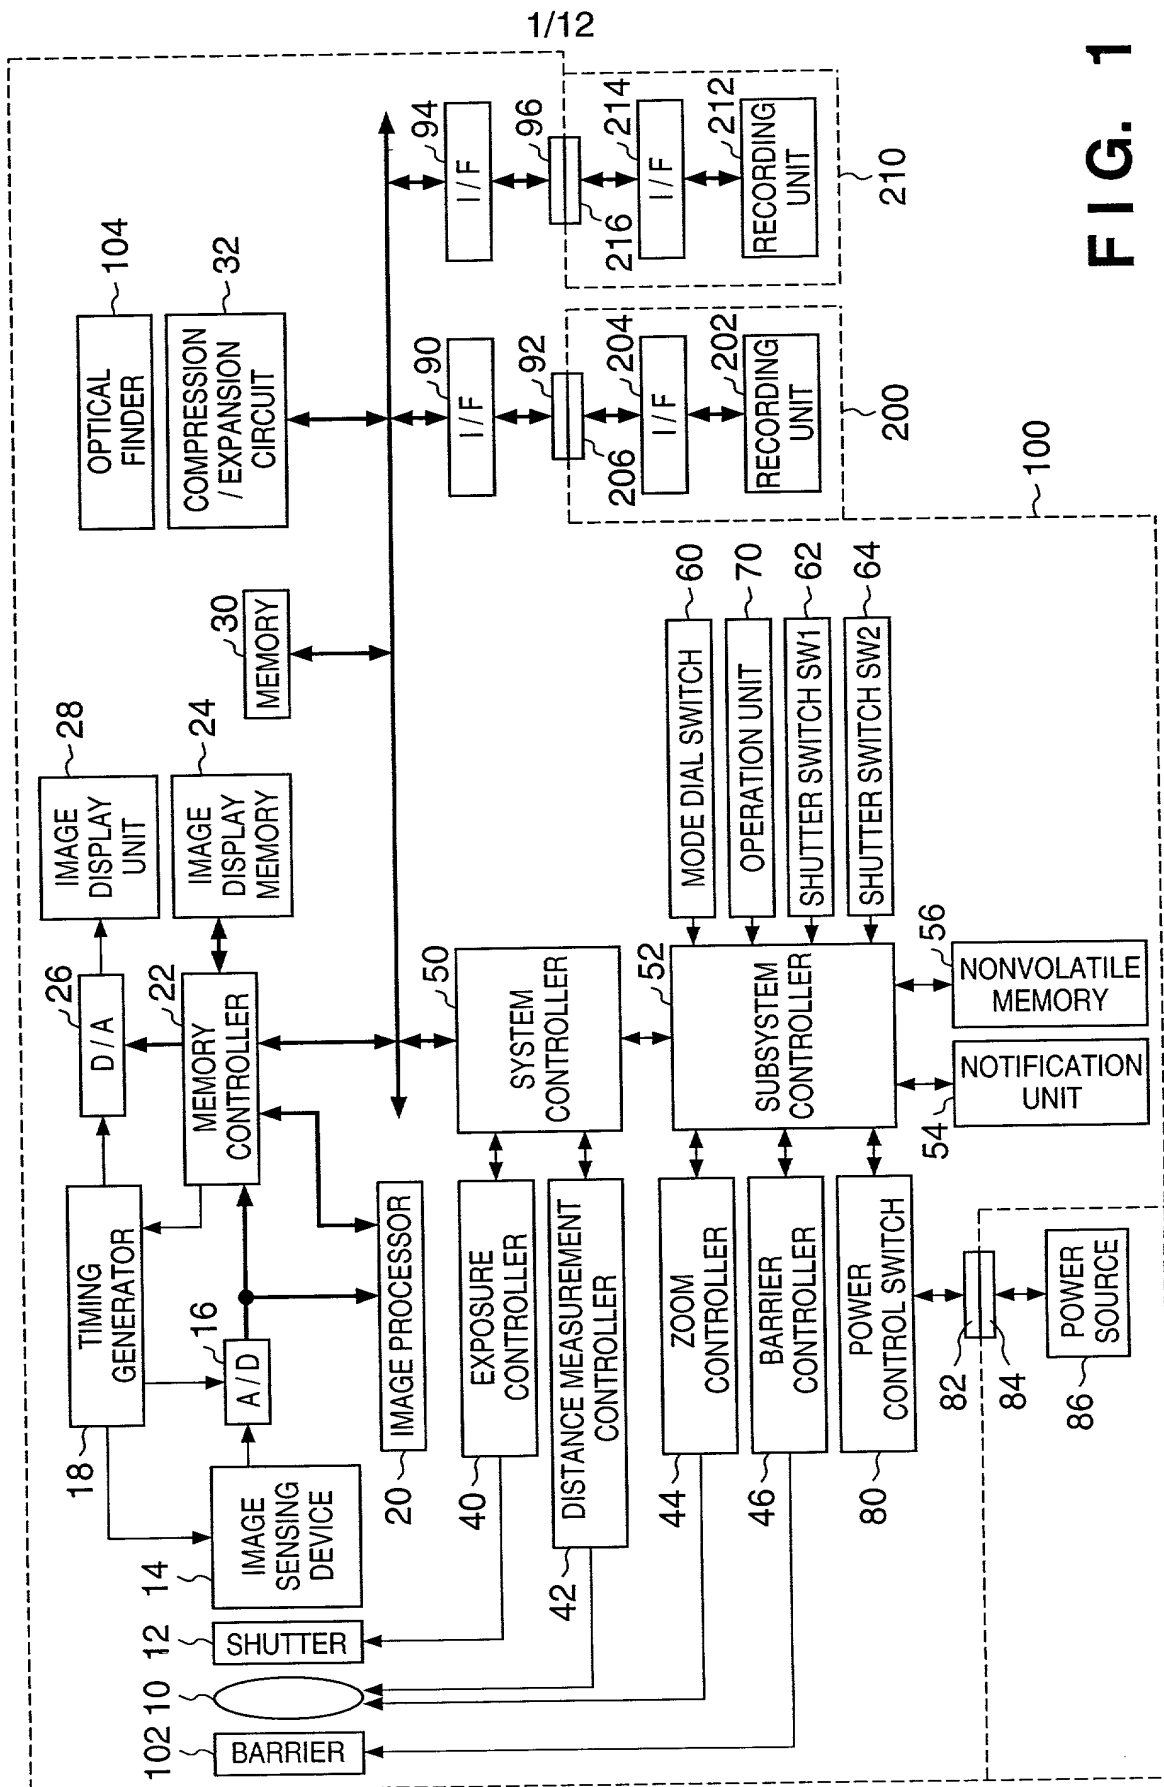


FIG. 1

FIG. 2

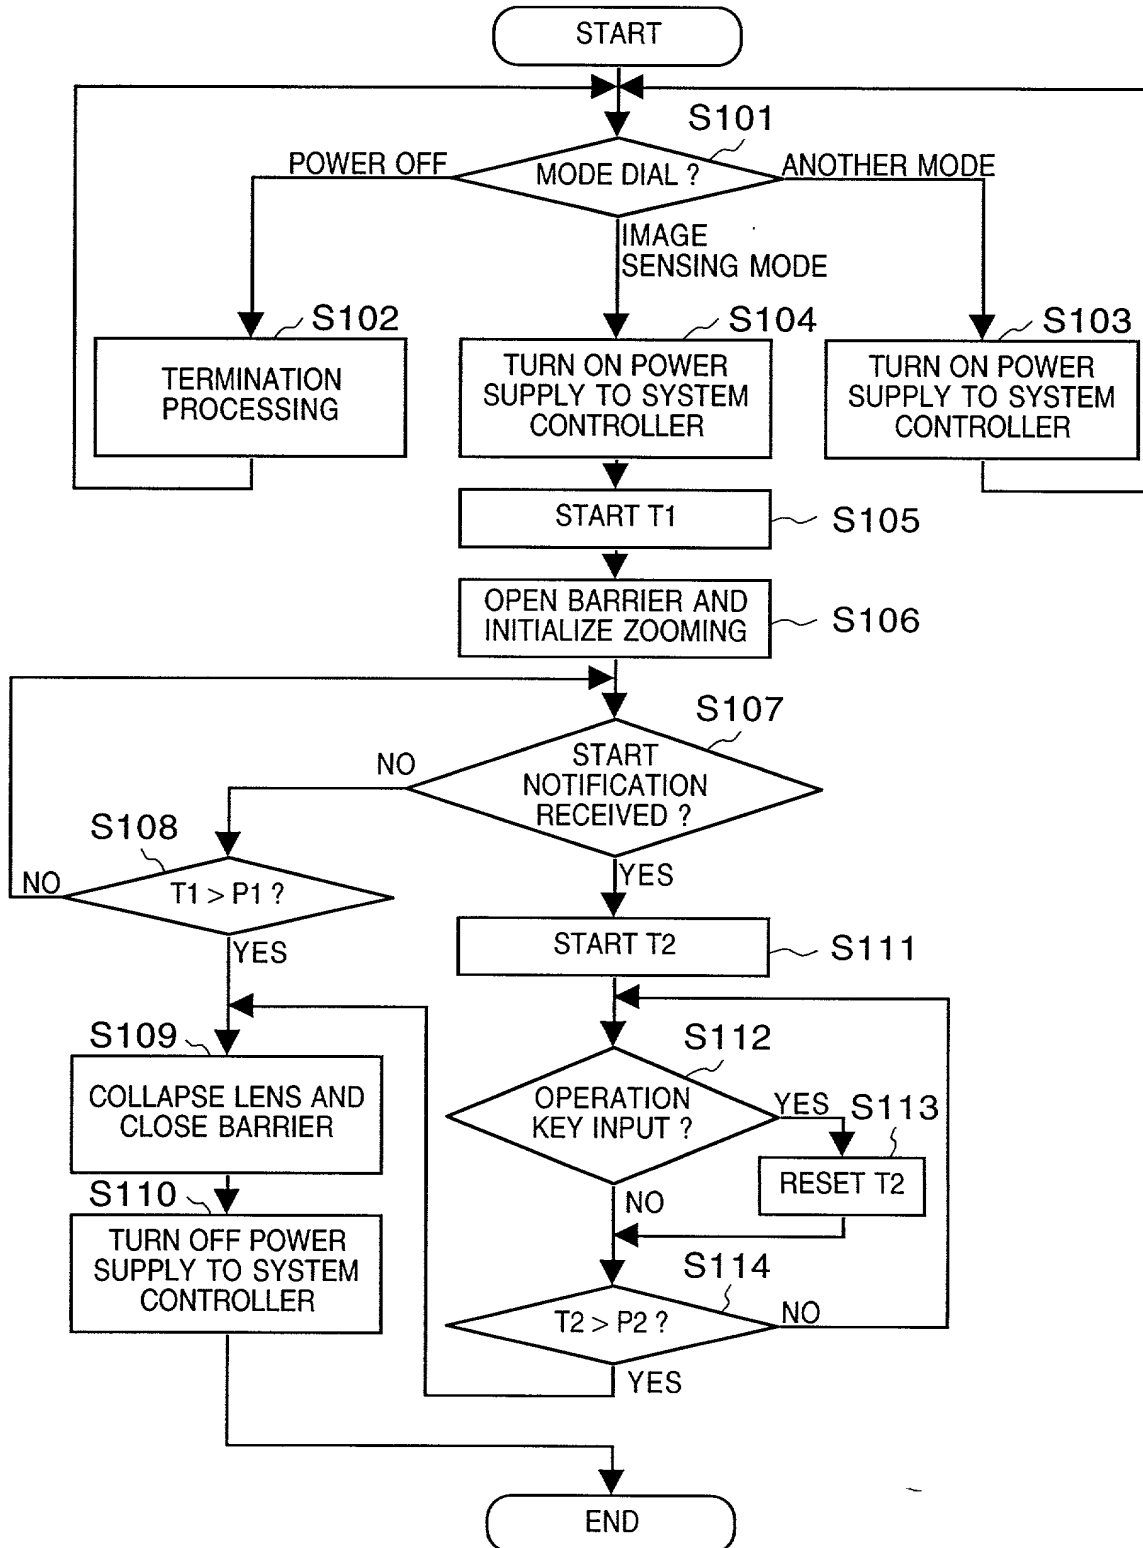


FIG. 3

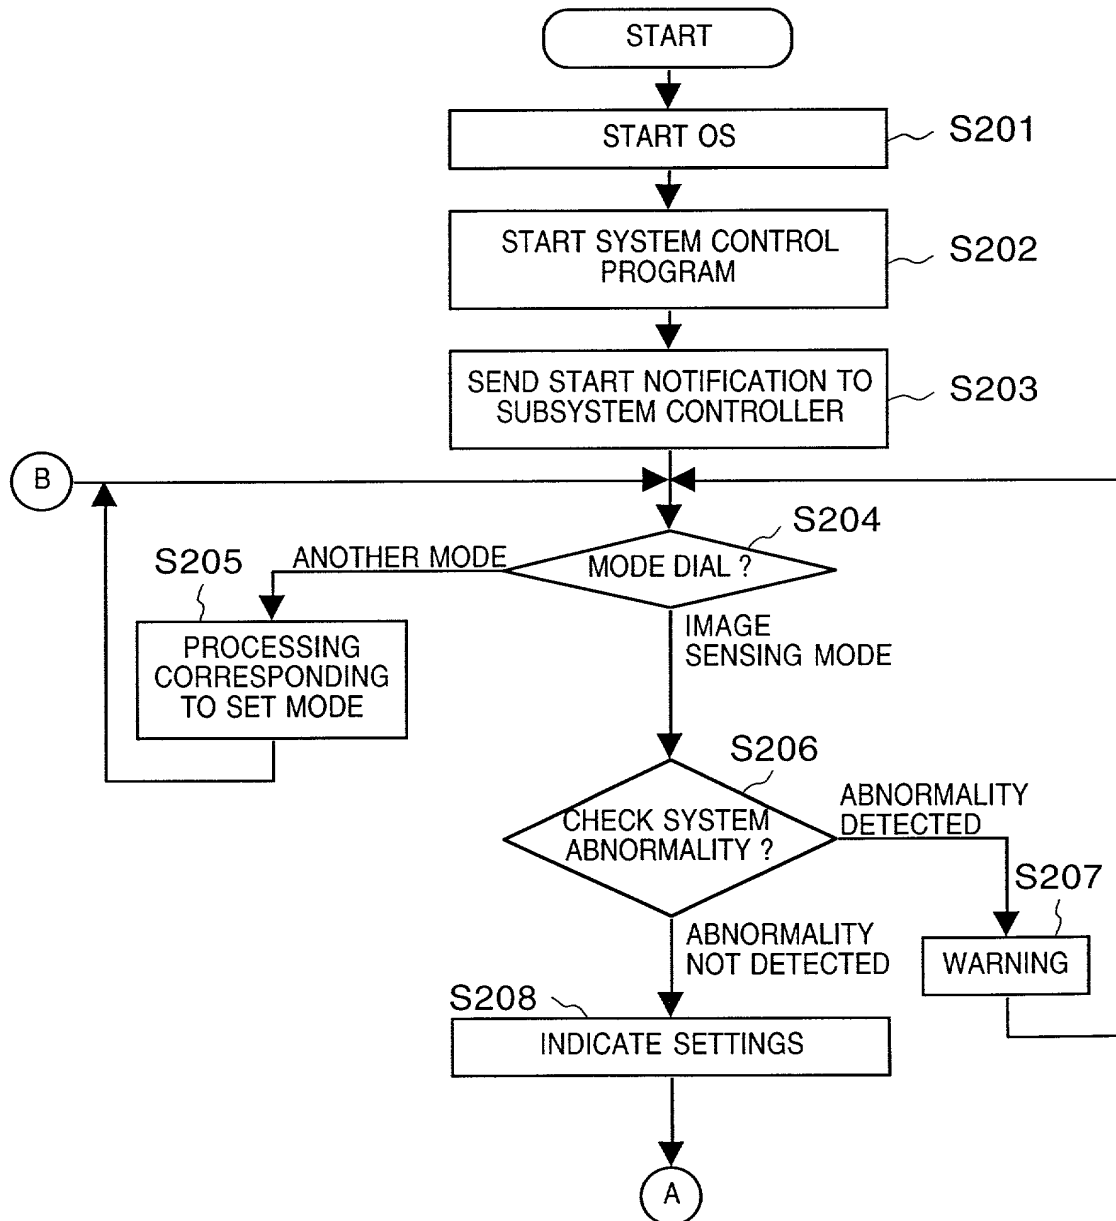


FIG. 4

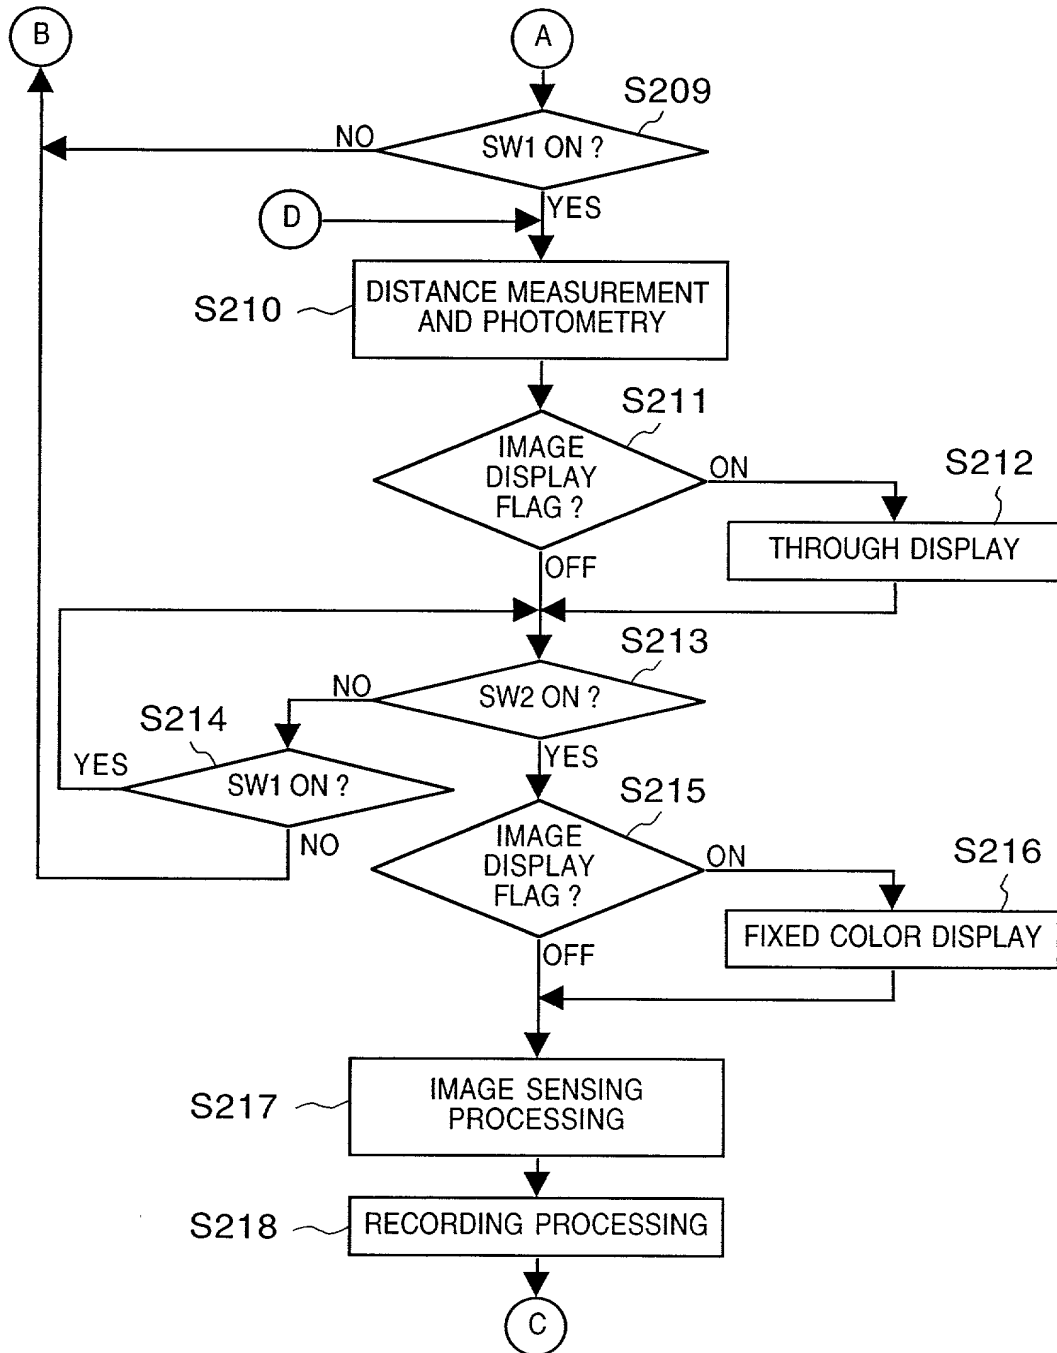


FIG. 5

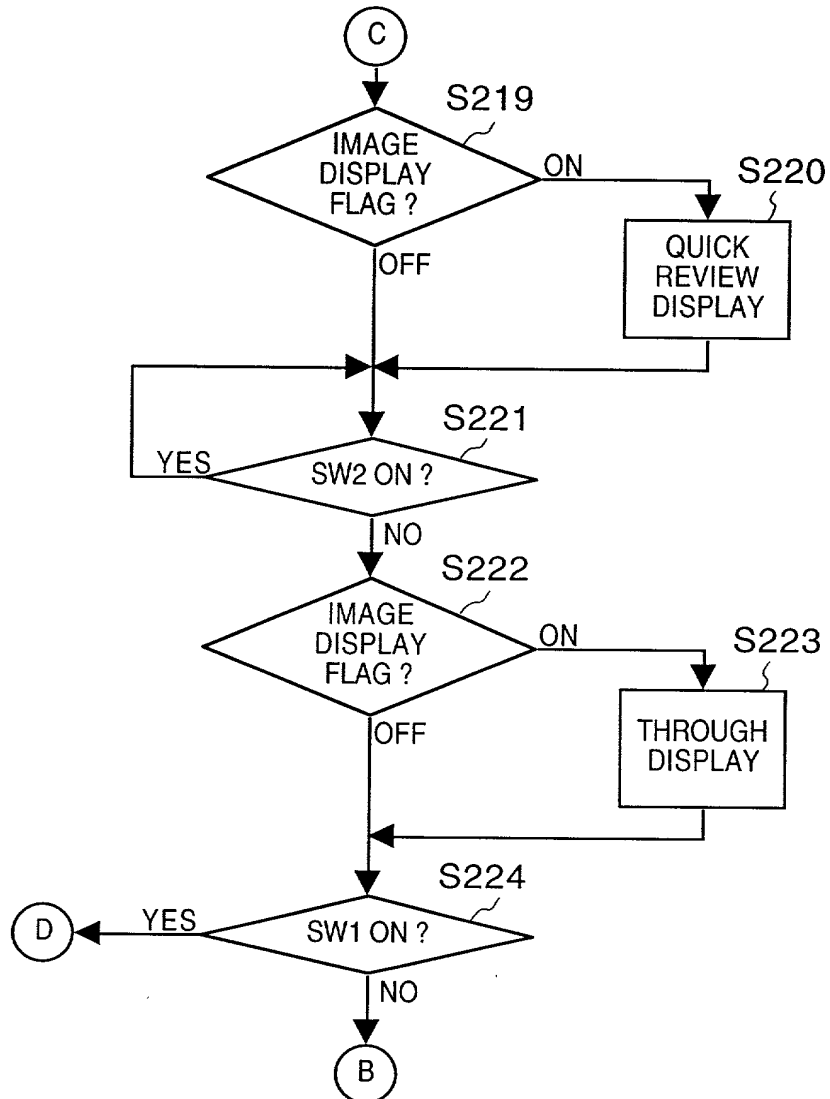
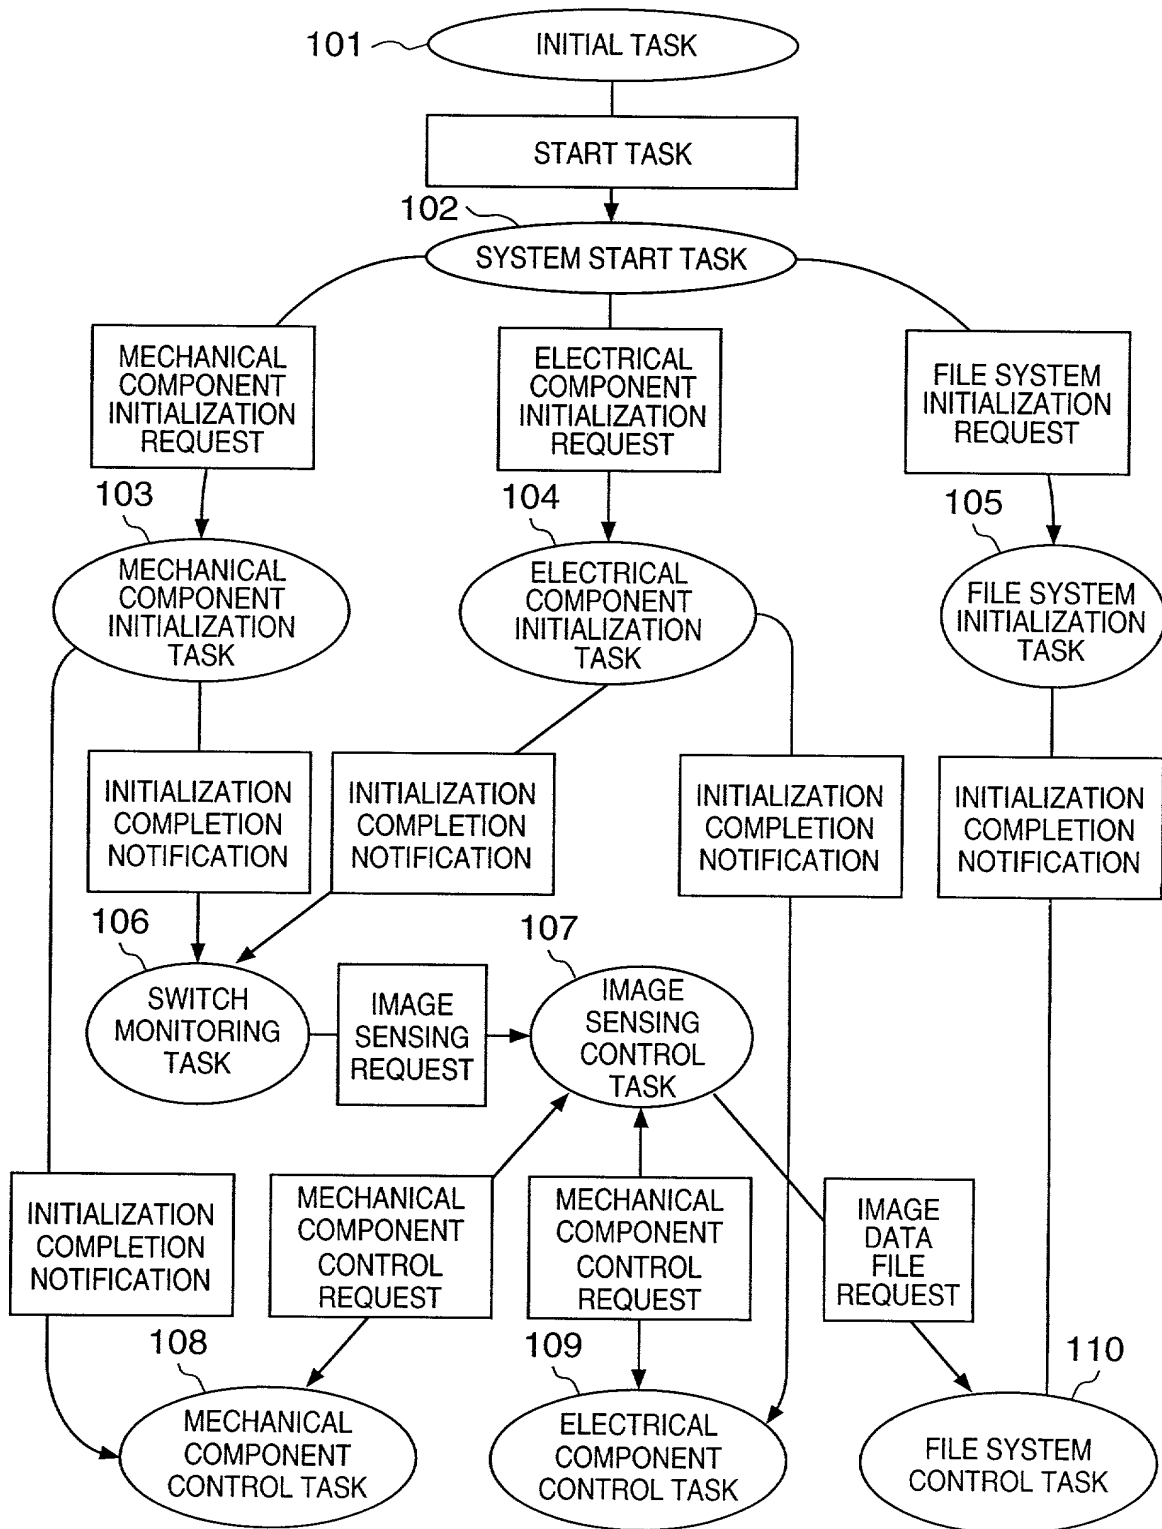
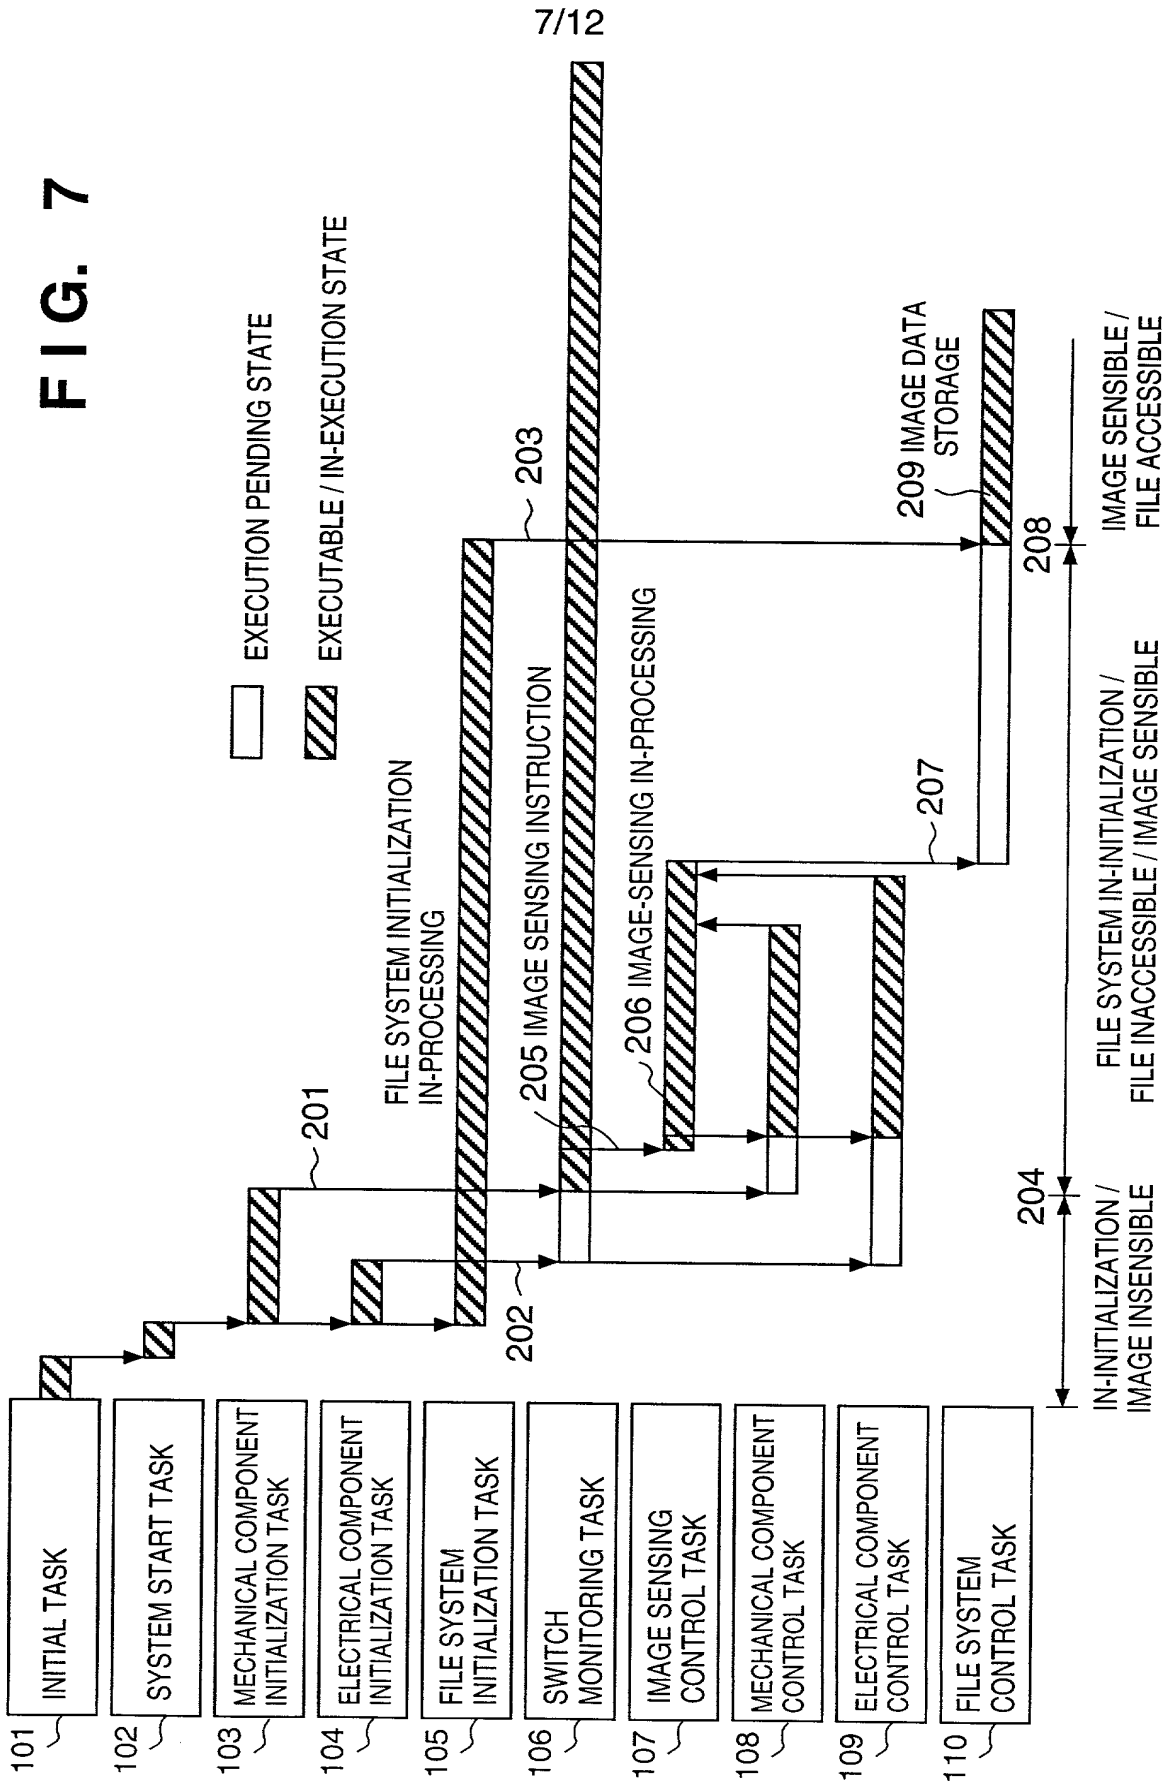


FIG. 6



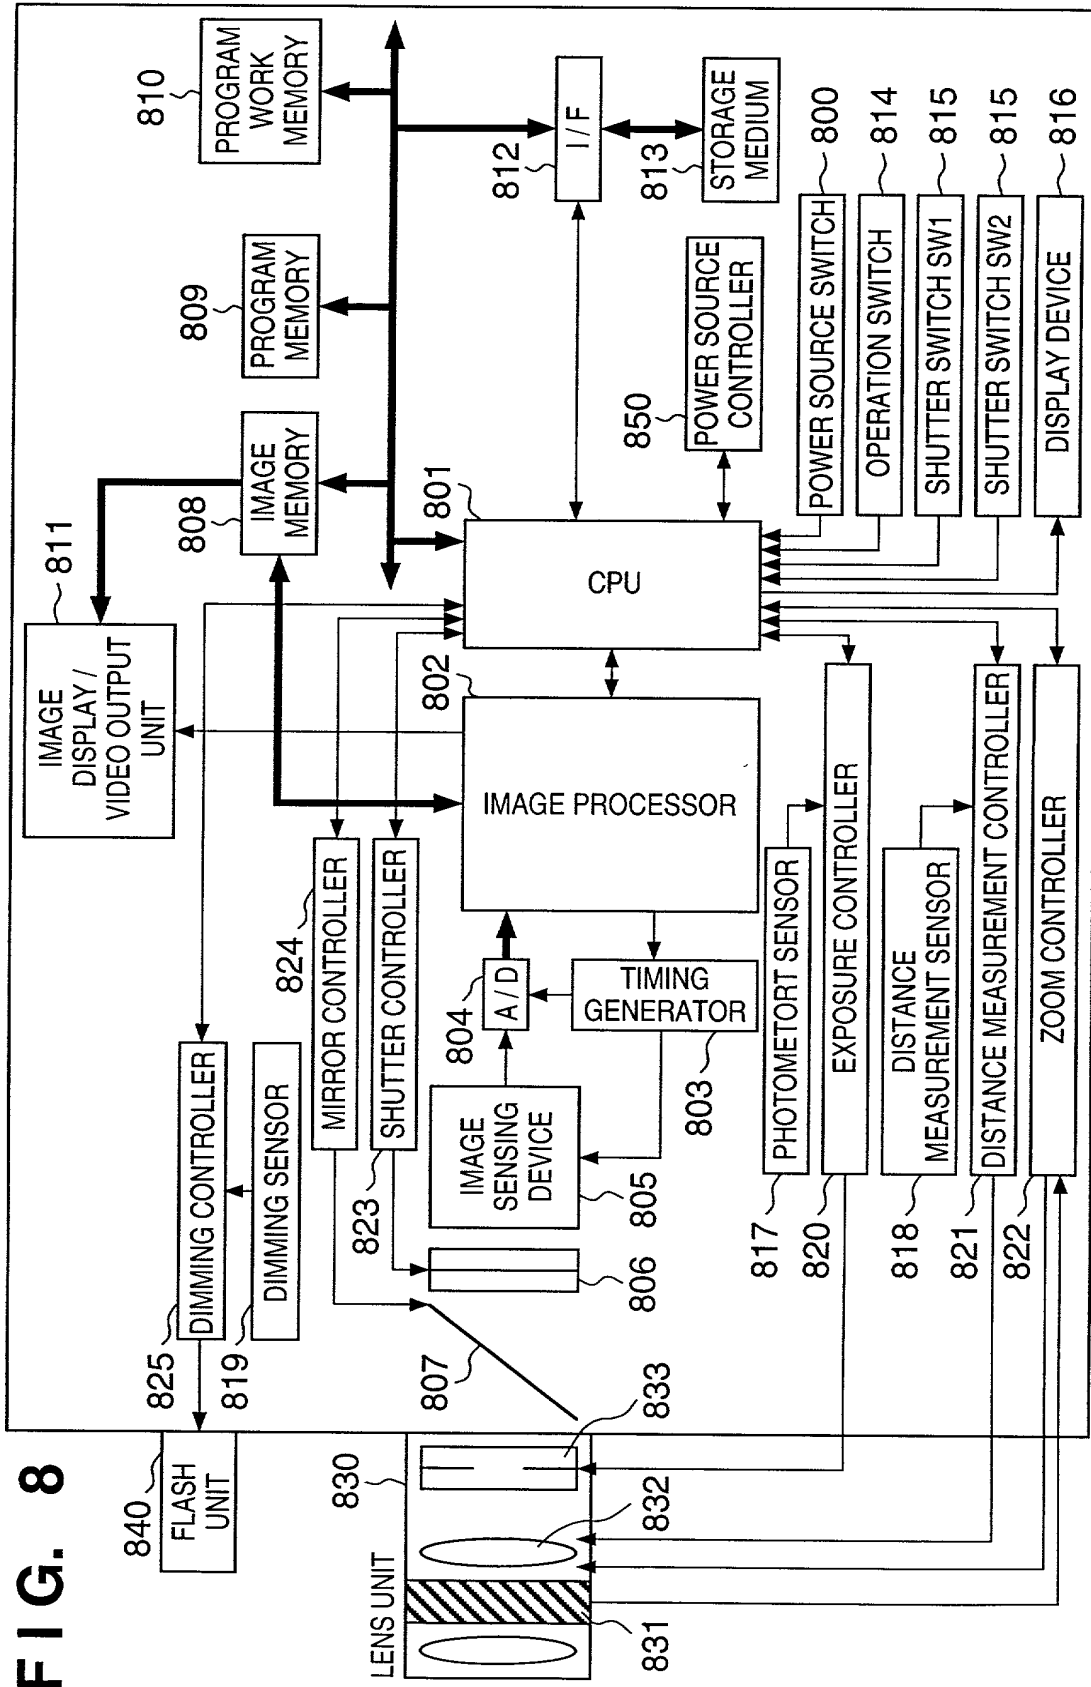
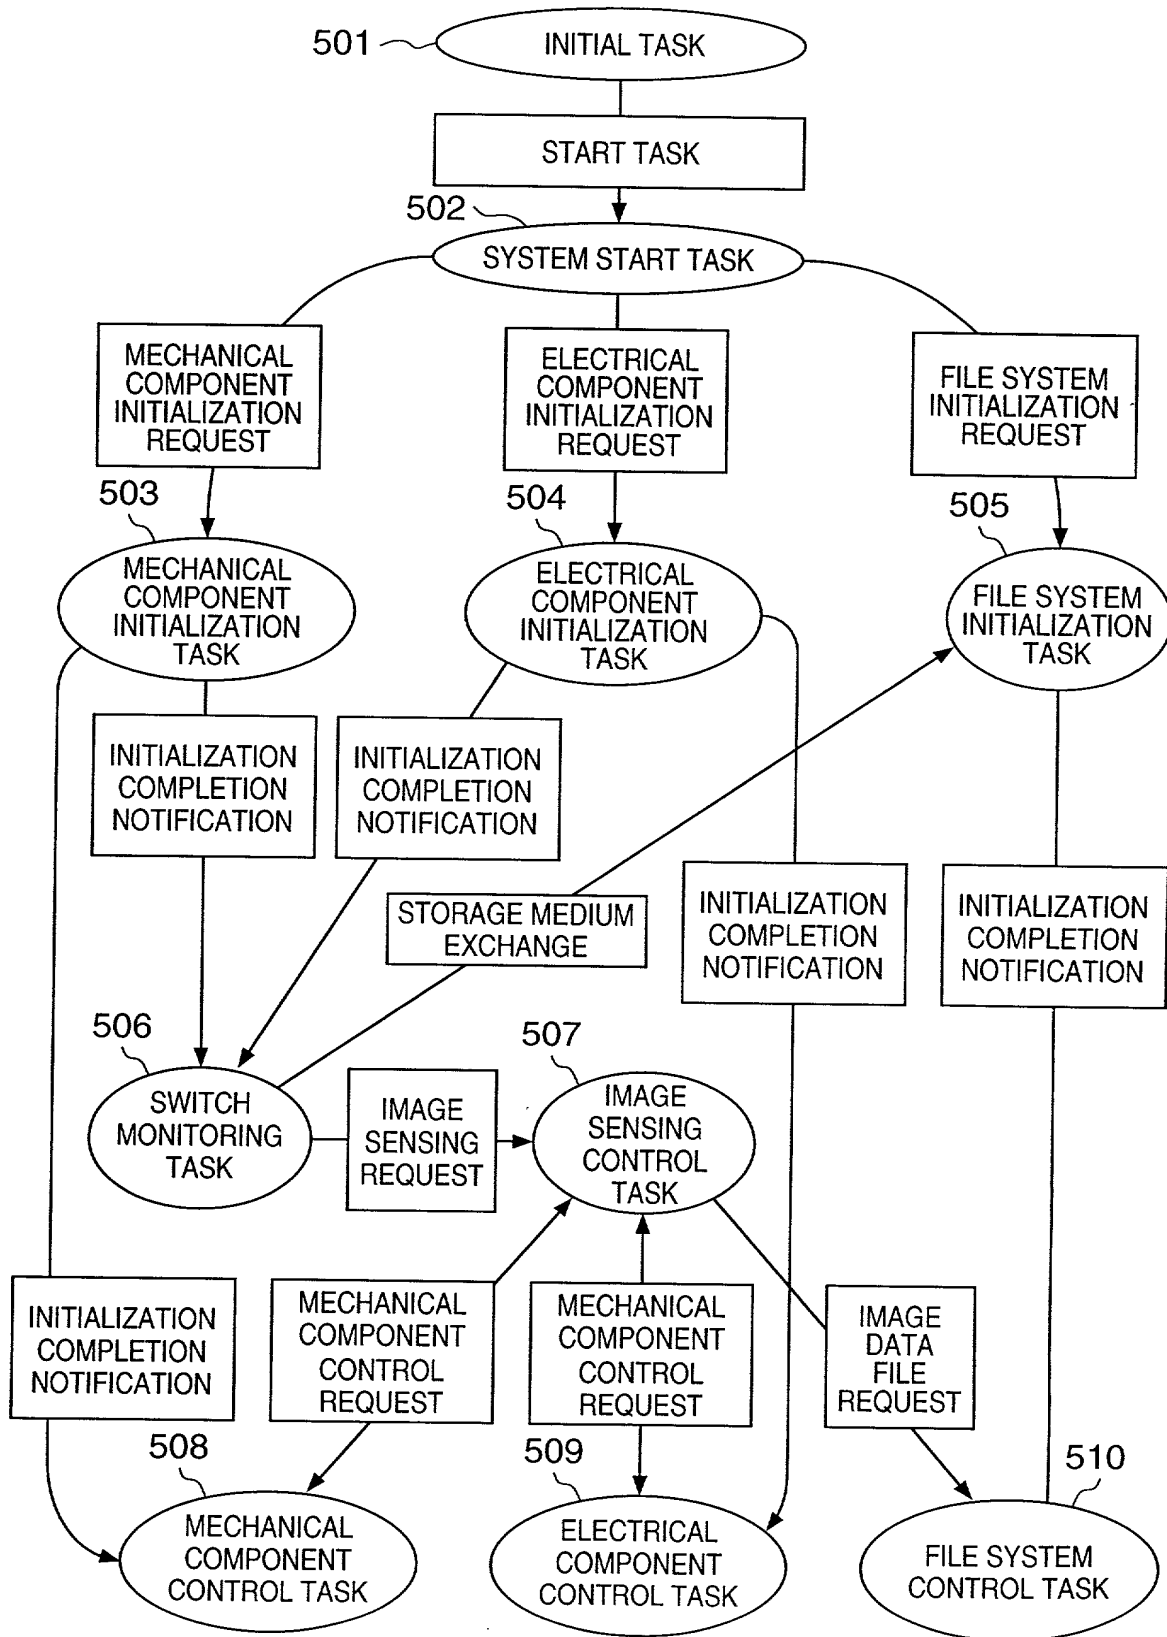
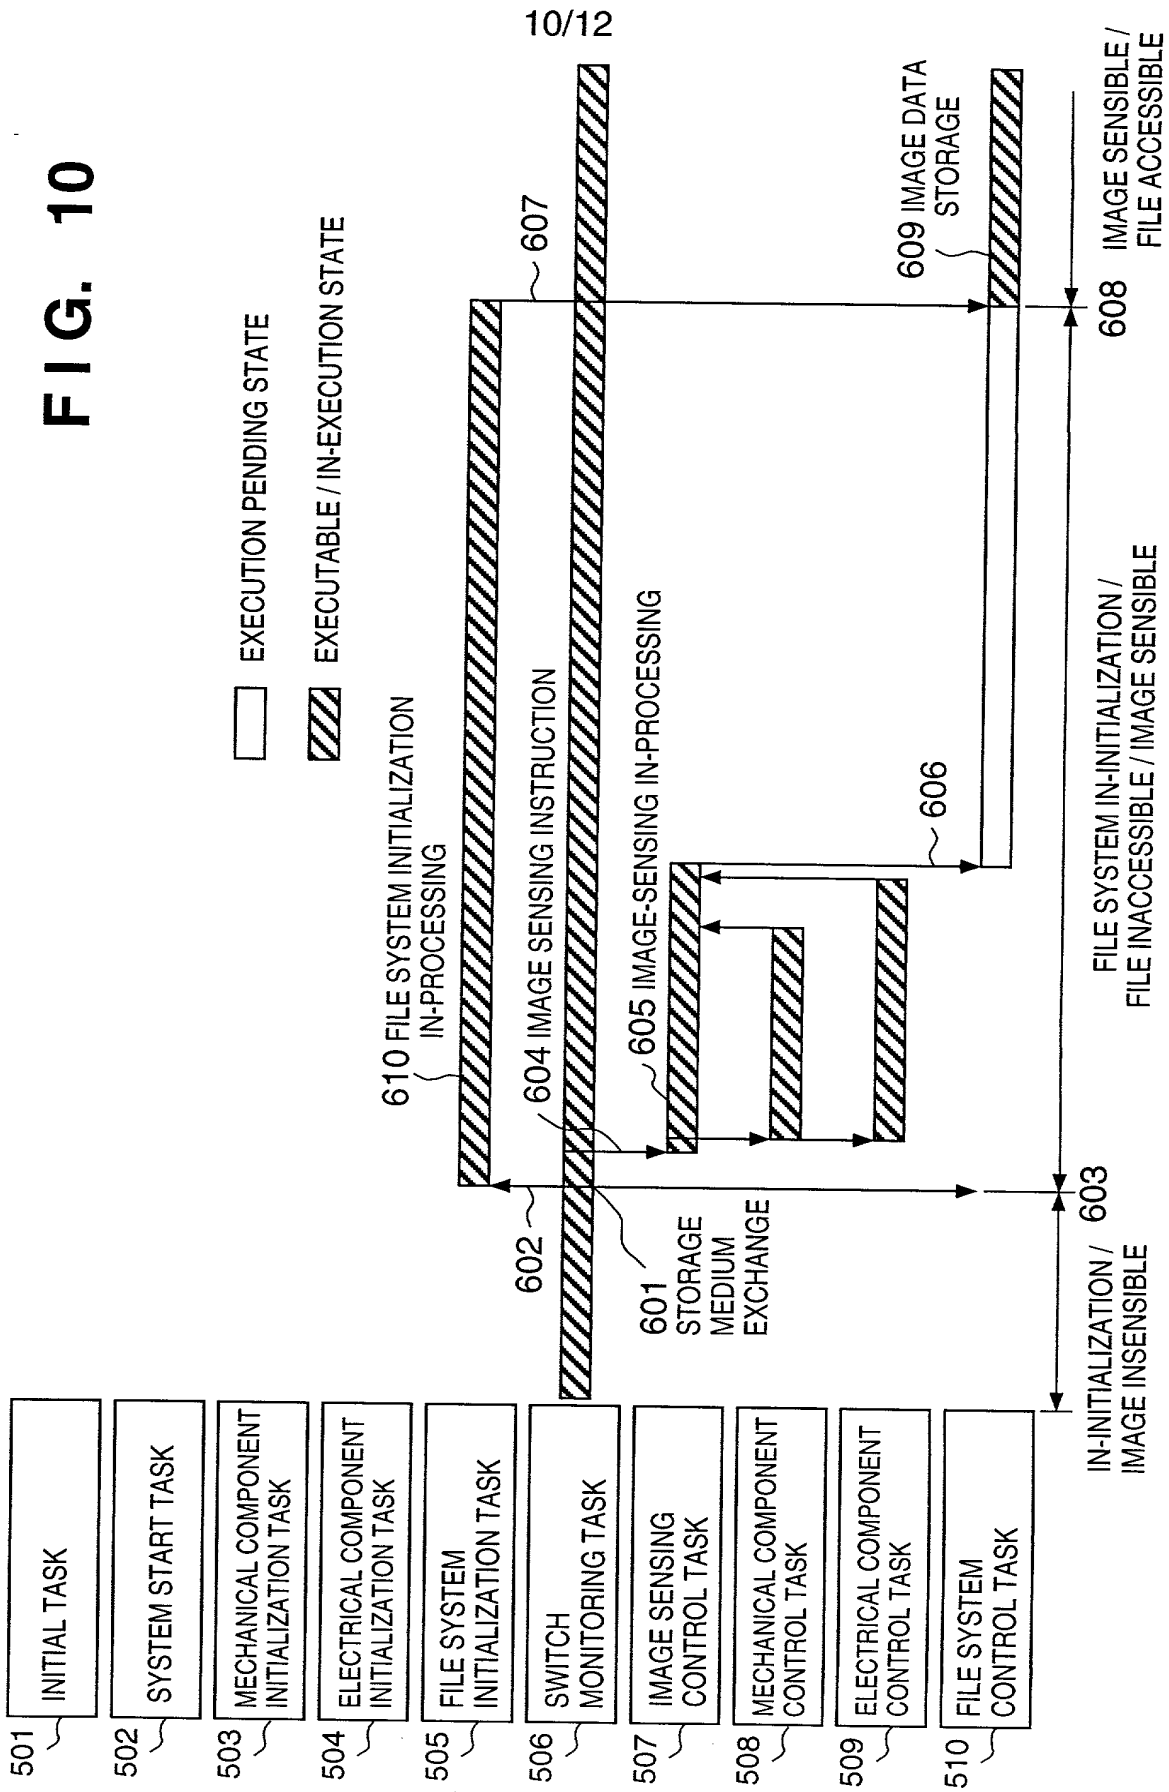


FIG. 9




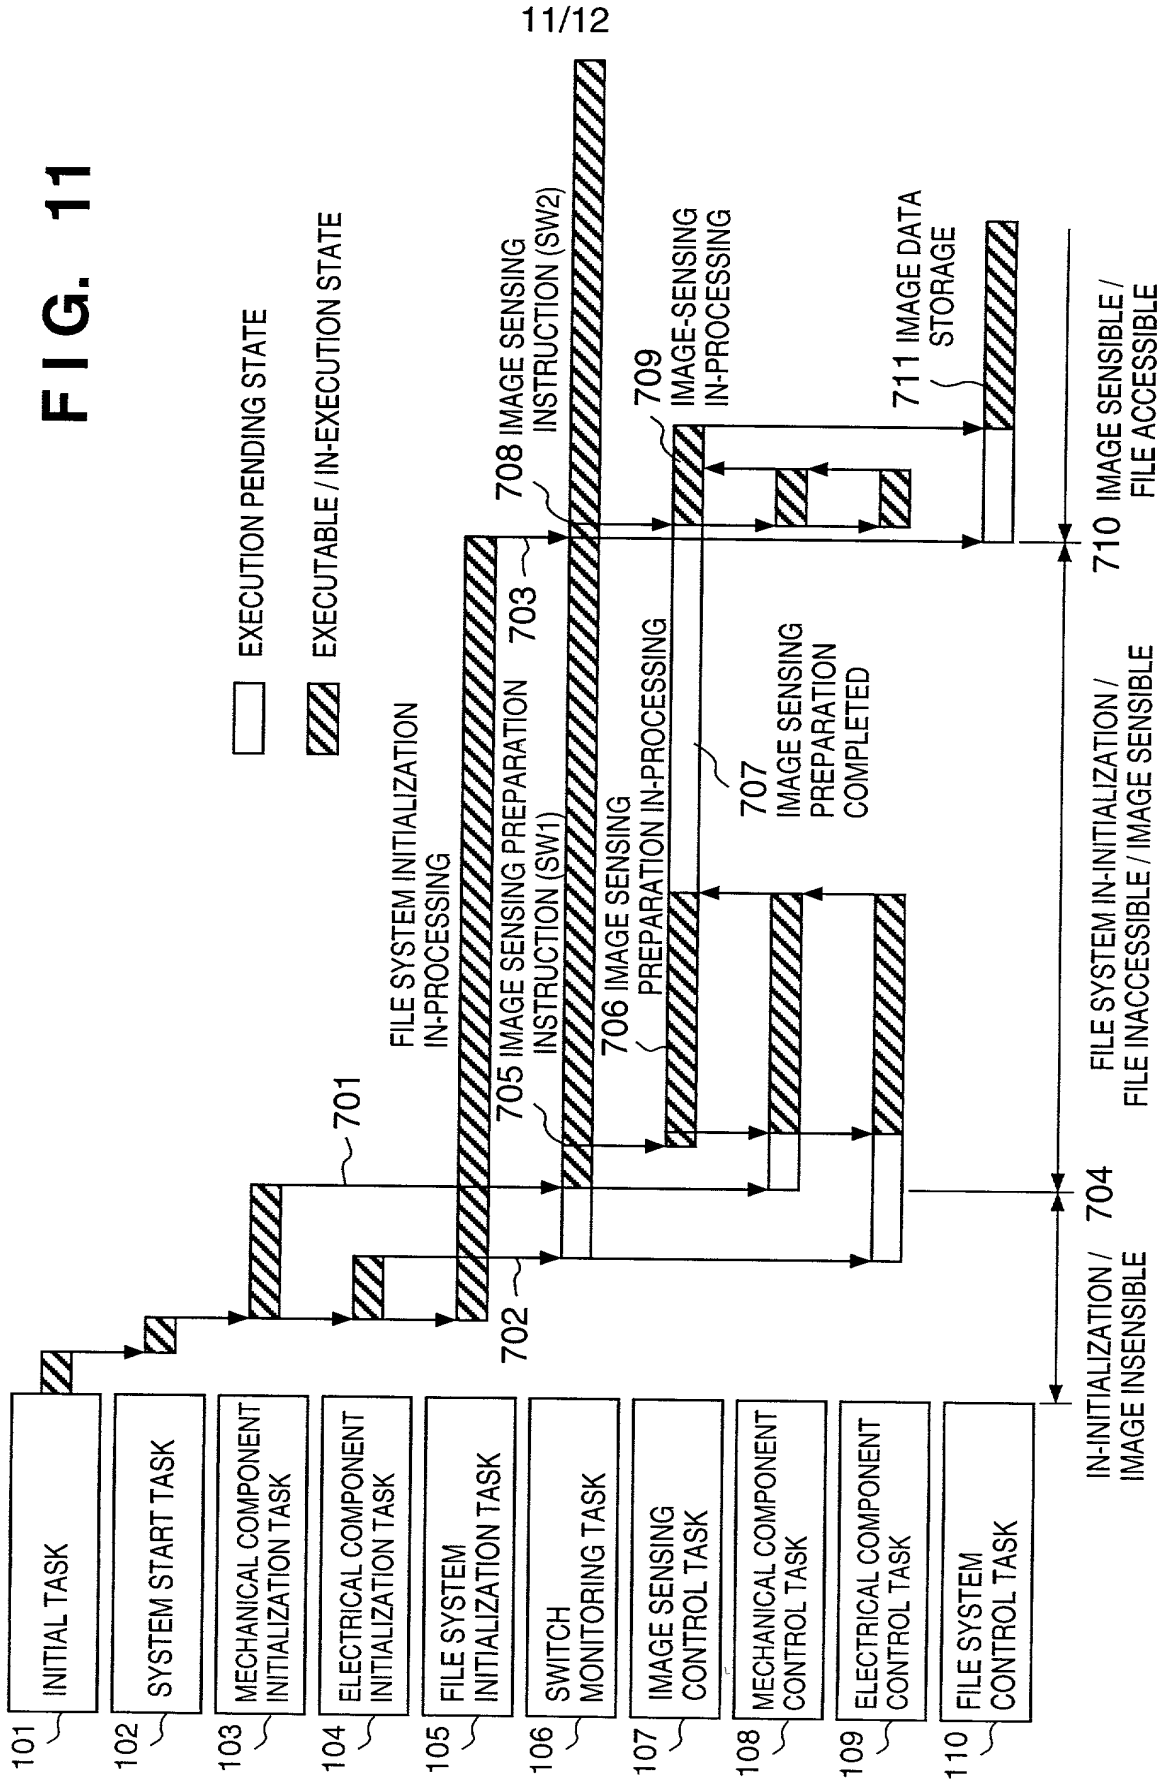


FIG. 12

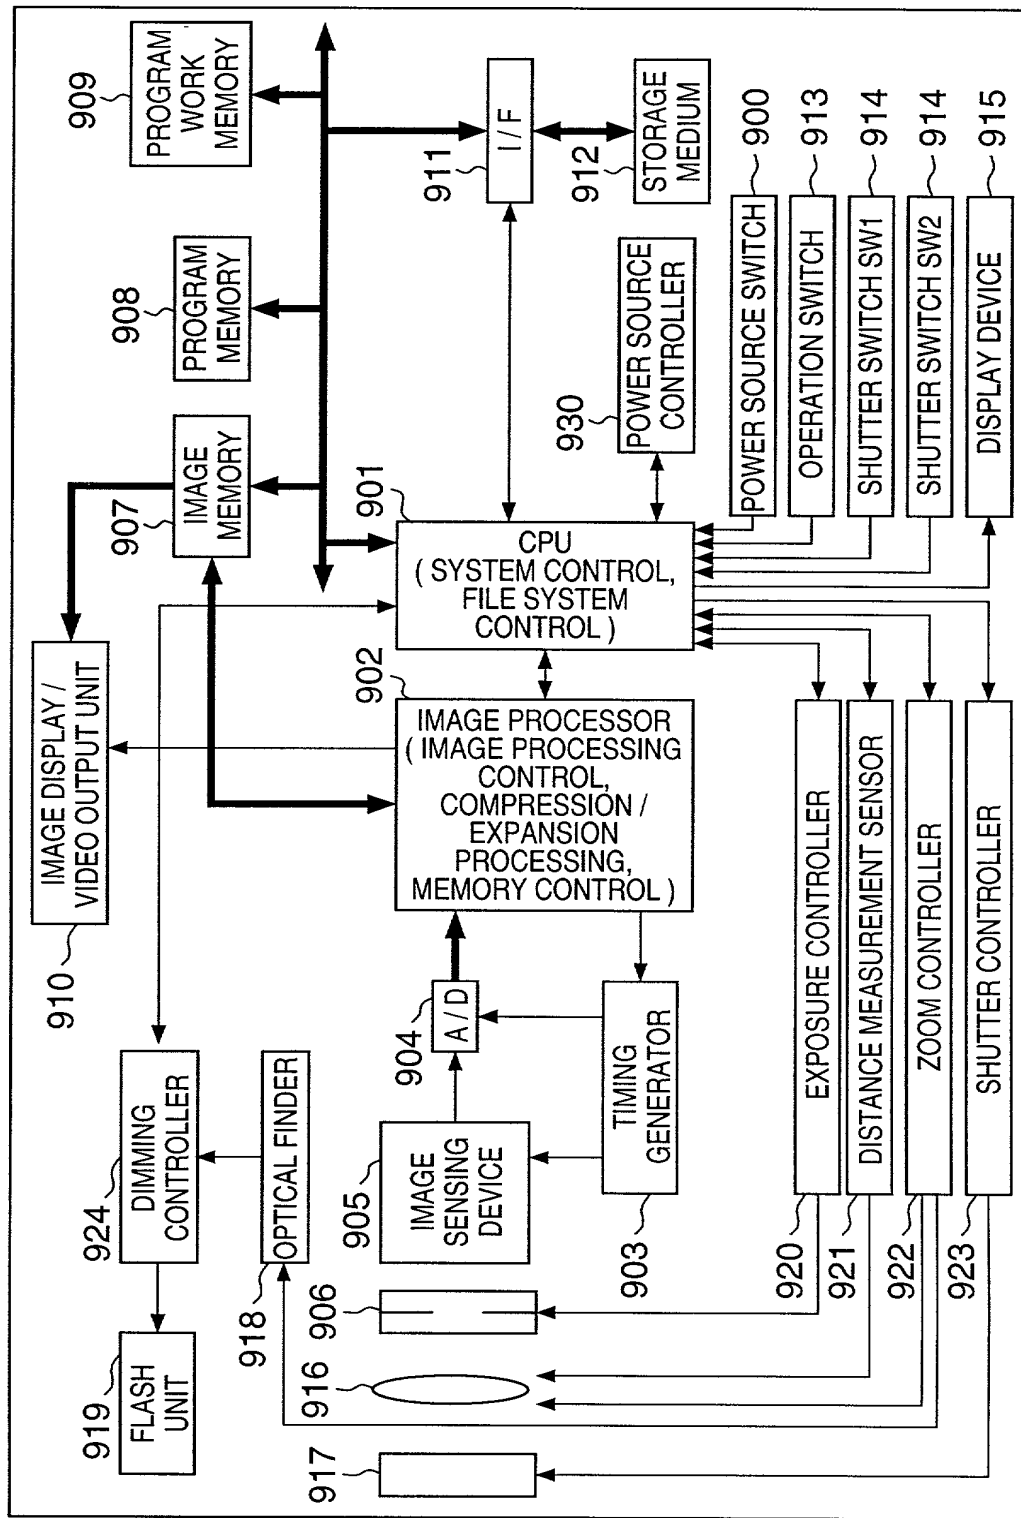

COMBINED DECLARATION AND POWER OF ATTORNEY FOR
ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL,
DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ELECTRONIC DEVICE USING OPERATING SYSTEM FOR OVERALL
APPARATUS CONTROL INCLUDING MECHANICAL OPERATION
the specification of which

a. ☒ is attached hereto

b. ☐ was filed on _____ as application Serial No. _____ and
was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL STAGE

c. ☐ was described and claimed in International Application No. _____ filed on
_____ and as amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby specify the following as the correspondence address to which all communications about this application are to be directed:

SEND CORRESPONDENCE TO: MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, N.Y. 10154

DIRECT TELEPHONE CALLS TO: MICHAEL M. MURRAY
(212) 758-4800

☒ I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or under § 365(b) of any foreign application(s) for patent or inventor's certificate or under § 365(a) of any PCT international application(s) designating at least one country other than the U.S. listed below and also have identified below such foreign application(s) for patent or inventor's certificate or such PCT international application(s) filed by me on the same subject matter having a filing date within twelve (12) months before that of the application on which priority is claimed:

☒ The attached 35 U.S.C. § 119 claim for priority for the application(s) listed below forms a part of this declaration.

Country/PCT	Application Number	Date of filing (day, month, yr)	Date of issue (day, month, yr)	Priority Claimed
Japan	10-286132	08, 10, 1999		[X] YES [] NO
Japan	11-218084	30, 07, 1999		[X] YES [] NO
				[] YES [] NO

[] I hereby claim the benefit under 35 U.S.C. § 119(e) of any U.S. provisional application(s) listed below.

Provisional Application No.

Date of filing (day, month, yr)

ADDITIONAL STATEMENTS FOR DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S.)

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s) or under § 365(c) of any PCT international application(s) designating the U.S. listed below.

US/PCT Application Serial No.	Filing Date,	Status (patented, pending, abandoned)/ U.S. application no. assigned (For PCT)
US/PCT Application Serial No.	Filing Date,	Status (patented, pending, abandoned)/ U.S. application no. assigned (For PCT)

[] In this continuation-in-part application, insofar as the subject matter of any of the claims of this application is not disclosed in the above listed prior United States or PCT international application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or Imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys and/or agents with full power of substitution and revocation, to prosecute this application, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith: John A. Diaz (Reg. No. 19,550), John C. Vassil (Reg. No. 19,098), Alfred P. Ewert (Reg. No. 19,887), David H. Pfeffer, P.C. (Reg. No. 19,825), Harry C. Marcus (Reg. No. 22,390), Robert E. Paulson (Reg. No. 21,046), Stephen R. Smith (Reg. No. 22,615), Kurt E. Richter (Reg. No. 24,052), J. Robert Dailey (Reg. No. 27,434), Eugene Moroz (Reg. No. 25,237), John F. Sweeney (Reg. No. 27,471), Arnold I. Rady (Reg. No. 26,601), Christopher A.

Hughes (Reg. No. 26,914), William S. Feiler (Reg. No. 26,728), Joseph A. Calvaruso (Reg. No. 28,287), James W. Gould (Reg. No. 28,859), Richard C. Komson (Reg. No. 27,913), Israel Blum (Reg. No. 26,710), Bartholomew Verdirame (Reg. No. 28,483), Maria C. H. Lin (Reg. No. 29,323), Joseph A. DeGirolamo (Reg. No. 28,595), Michael A. Nicodema (Ref. No. 33,199), Michael P. Dougherty (Ref. No. 32,730), Seth J. Altas (Reg. No. 32,454), Andrew M. Riddles (Reg. No. 31,657), Bruce D. DeRenzi (Reg. No. 33,676), Michael M. Murray (Reg. No. 32,537) and Mark J. Abate (Reg. No. 32,527); Alfred L. Haffner, Jr. (Reg. No. 18,919), Harold Haidt (Reg. No. 17,509), John T. Gallagher (Reg. No. 35,516), Steven F. Meyer (Reg. No. 35,613); Kenneth H. Sonnenfeld (Reg. No. 33,285), Edward A. Pennington (Reg. No. 32,588), Michael S. Marcus (Reg. No. 31,727) and John E. Hoel (Reg. No. 26,279) of Morgan & Finnegan, L.L.P., whose address is: 345 Park Avenue, New York, New York 10154.

☐ I hereby authorize the U.S. attorneys and/or agents named hereinabove to accept and follow instructions from _____

as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and/or agents and me. In the event of a change in the person(s) from whom instructions may be taken I will so notify the U.S. attorneys and /or agents named hereinabove.

Full name of sole or first inventor Masaki OKADA

Inventor's signature* Masaki Okada

Date October 1, 1999

31-7-302, Nishiterao 4-chome, Kanagawa-ku,
Residence Yokohama-shi, Kanagawa-ken, Japan

Citizenship Japan

c/o CANON KABUSHIKI KAISHA
Post Office Address 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full name of second inventor Keihiro KURAKATA

Inventor's signature* Keihiro Kurakata

Date October 1, 1999

72-1-409, Suzukicho 1-chome, Kodaira-shi,
Residence Tokyo, Japan

Citizenship Japan

c/o CANON KABUSHIKI KAISHA
Post Office Address 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

☐ ATTACHED IS ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR SIGNATURE BY THIRD AND SUBSEQUENT INVENTORS FORM.

* Before signing this declaration, each person signing must:

1. Review the declaration and verify the correctness of all information therein; and
2. Review the specification and the claims, including any amendments made to the claims.

After the declaration is signed, the specification and claims are not to be altered.

To the inventor(s):

The following are cited in or pertinent to the declaration attached to the accompanying application:

Title 37, Code of Federal Regulation, § 1.56

Duty to disclose information material to patentability.

(a) A patent by its very nature is affect with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- and
- (1) prior art cited in search reports of a foreign patent office in a counterpart application,
 - (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

Title 35, U.S. Code § 101

Inventions patentable

Whoever invents or discovers any new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof, may obtain a patent therefor, subject to the conditions and requirements of this title.

Title 35 U.S. Code § 102

Conditions for patentability; novelty and loss of right to patent

A person shall be entitled to a patent unless –

- (a) the invention was known or used by others in this country, or patented or described in a printed publication in this or a foreign country, before the invention thereof by the applicant for patent,
- (b) the invention was patented or described in a printed publication in this or foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States, or

- (c) he has abandoned the invention, or
- (d) the invention was first patented or caused to be patented, or was the subject of an inventor's certificate, by the applicant or his legal representatives or assigns in a foreign country prior to the date of the application for patent in this country on an application for patent or inventor's certificate filed more than twelve months before the filing of the application in the United States, or
- (e) the invention was described in a patent granted on an application for patent by another filed in the United States before the invention thereof by the applicant for patent, or on an international application by another who has fulfilled the requirements of paragraphs (1), (2), and (4) of section 371(c) of this title before the invention thereof by the applicant for patent, or
- (f) he did not himself invent the subject matter sought to be patented, or
- (g) before the applicant's invention thereof the invention was made in this country by another had not abandoned, suppressed, or concealed it. In determining priority of invention there shall be considered not only the respective dates of conception and reduction to practice of the invention, but also the reasonable diligence of one who was first to conceive and last to reduce to practice, from a time prior to conception by the other ...

Title 35, U.S. Code § 103

Conditions for patentability; non-obvious subject matter

A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said matter pertains. Patentability shall not be negated by the manner in which the invention was made.

Subject matter developed by another person, which qualifies as prior art only under subsection (f) or (g) of section 102 of this title, shall not preclude patentability under this section where the subject matter and the claimed invention were, at the time the invention was made, owned by the same person or subject to an obligation of assignment to the same person.

Title 35, U.S. Code § 112 (in part)

Specification

The specification shall contain a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise and exact terms also enable any person skilled in the art to which it pertains, or with which it is mostly nearly connected, to make and use the same, and shall set forth the best mode contemplated by the inventor of carrying out his invention.

Title 35, U.S. Code § 119

Benefit of earlier filing date in foreign country; right of priority

An application for patent for an invention filed in this country by any person who has, or whose legal representatives or assigns have, previously regularly filed an application for a patent for the same invention in a foreign country which affords similar privileges in the case of applications filed in the United States or to citizens of the United States, shall have the same effect as the same application would have if filed in this country on the date on which the application for patent for the same invention was first filed in such foreign country, if the application in this country is filed within twelve months from the earliest date on which such

foreign application was filed; but no patent shall be granted on any application for patent for an invention which had been patented or described in a printed publication in any country more than one year before the date of the actual filing of the application in this country, or which had been in public use or on sale in this country more than one year prior to such filing.

Title 35, U.S. Code § 120

Benefit or earlier filing date in the United States

An application for patent for an invention disclosed in the manner provided by the first paragraph of section 112 of this title in an application previously filed in the United States, or as provided by section 363 of this title, which is filed by an inventor or inventors named in the previously filed application shall have the same effect, as to such invention, as though filed on the date of the prior application, if filed before the patenting or abandonment of or termination of proceedings on the first application or an application similarly entitled to the benefit of the filing date of the first application and if it contains or is amended to contain a specific reference to the earlier filed application.

Please read carefully before signing the Declaration attached to the accompanying Application.

If you have any questions, please contact Morgan & Finnegan, L.L.P.

FORM:COMB-DEC.NY

Rev. 5/21/98